




POLYURETHANE BASED
WALL DECORATION PRODUCTS

Ladrillo Barock

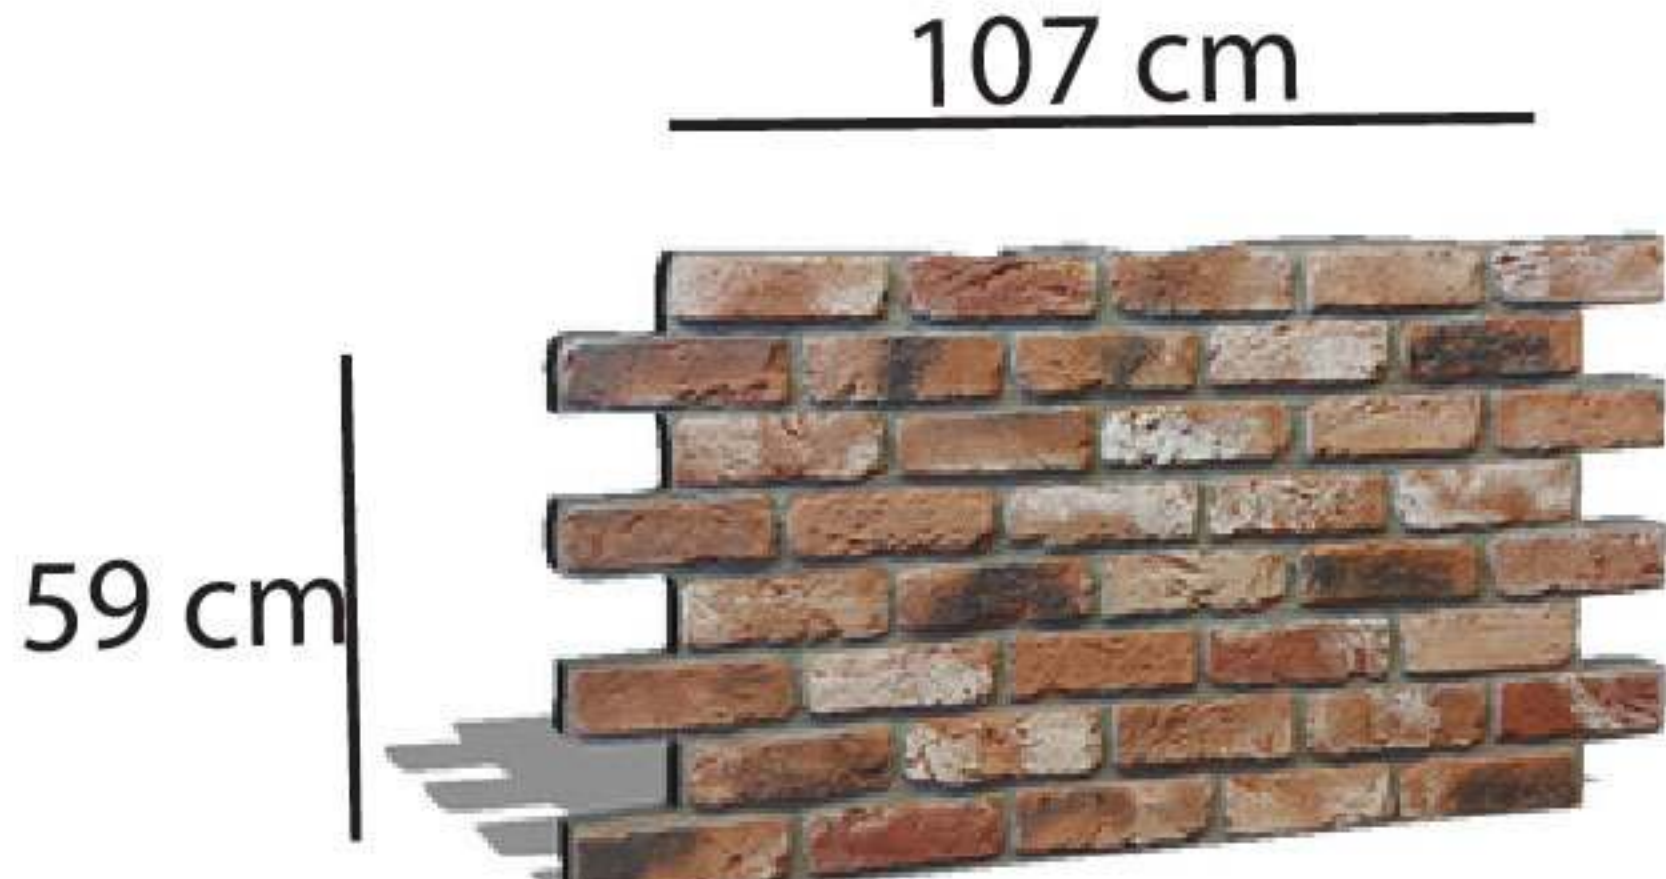


Dimensions : 0,6313 m²
Thickness : 2,7 cm


Tudor




Blancura

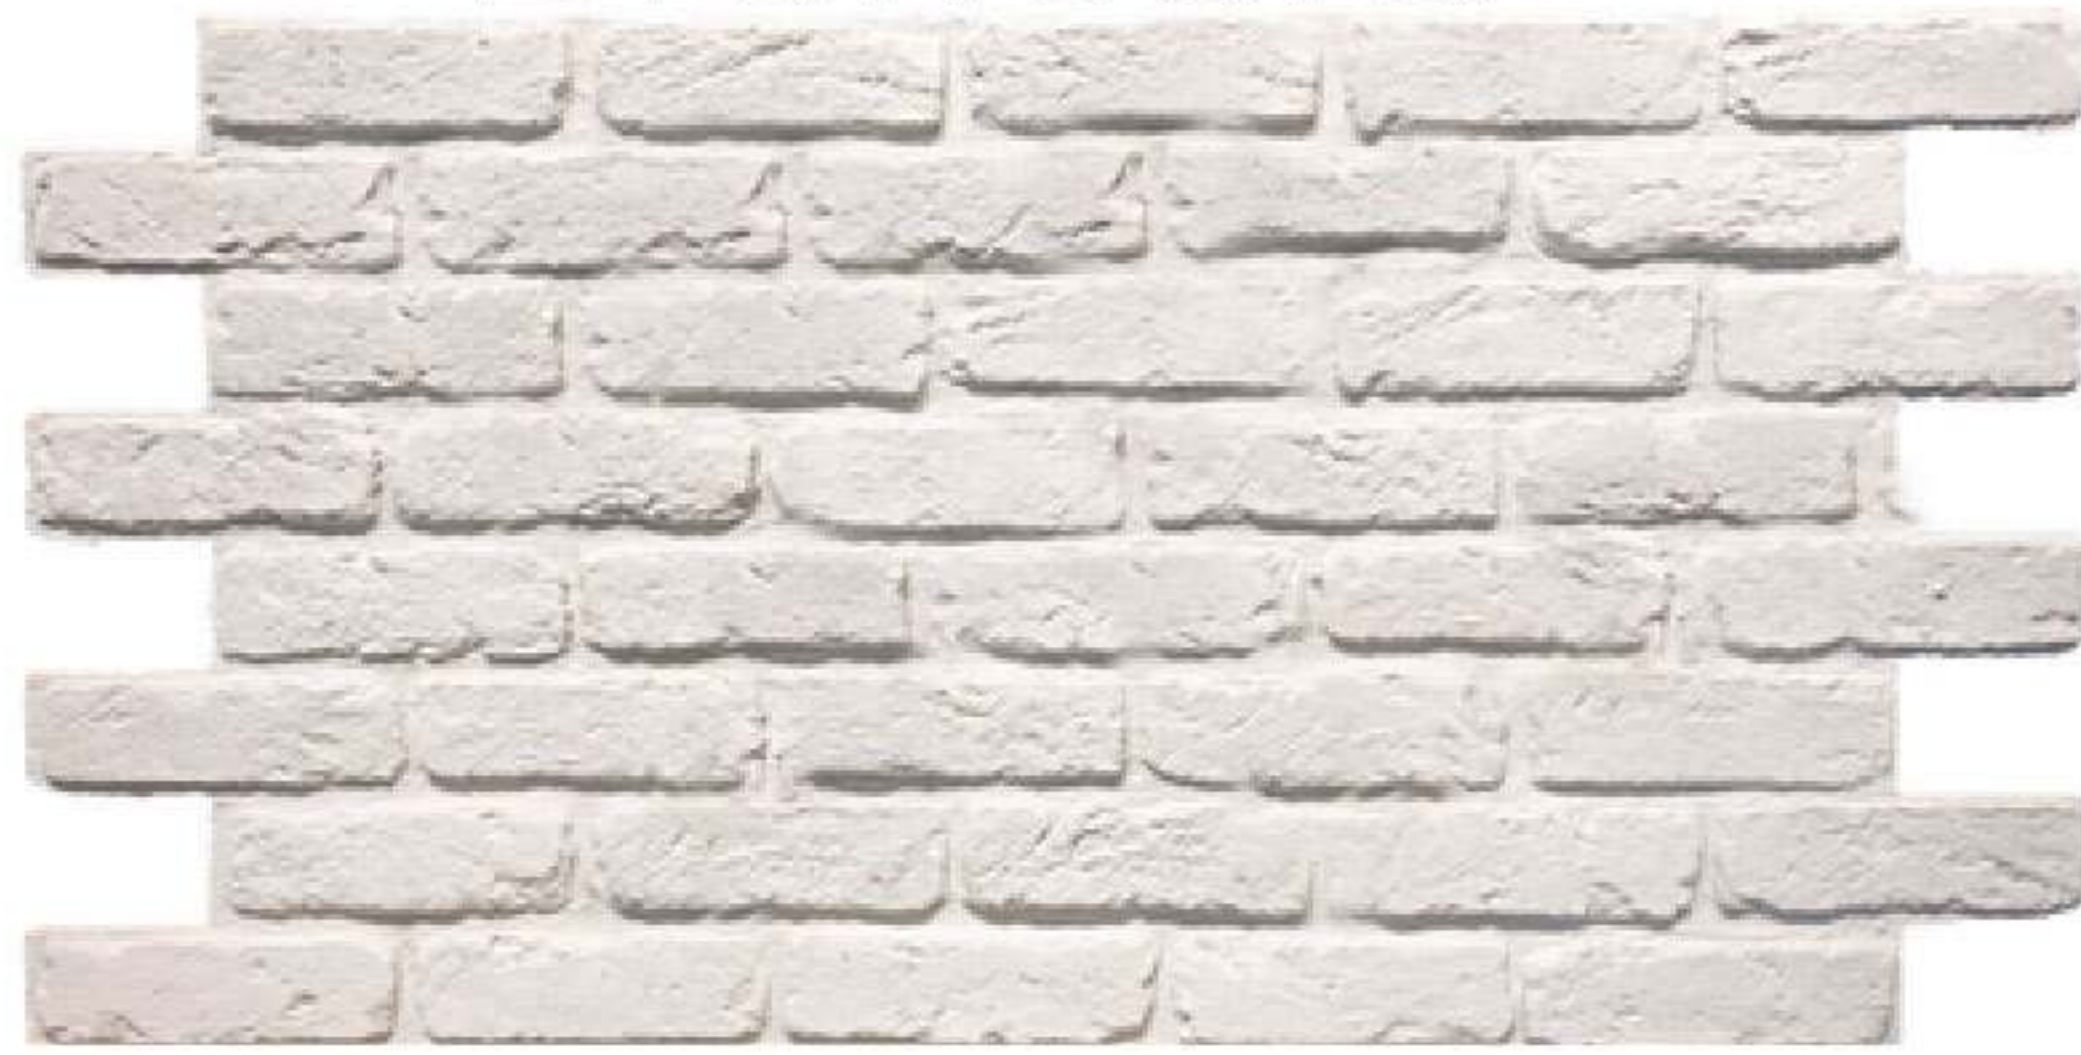

Rustic

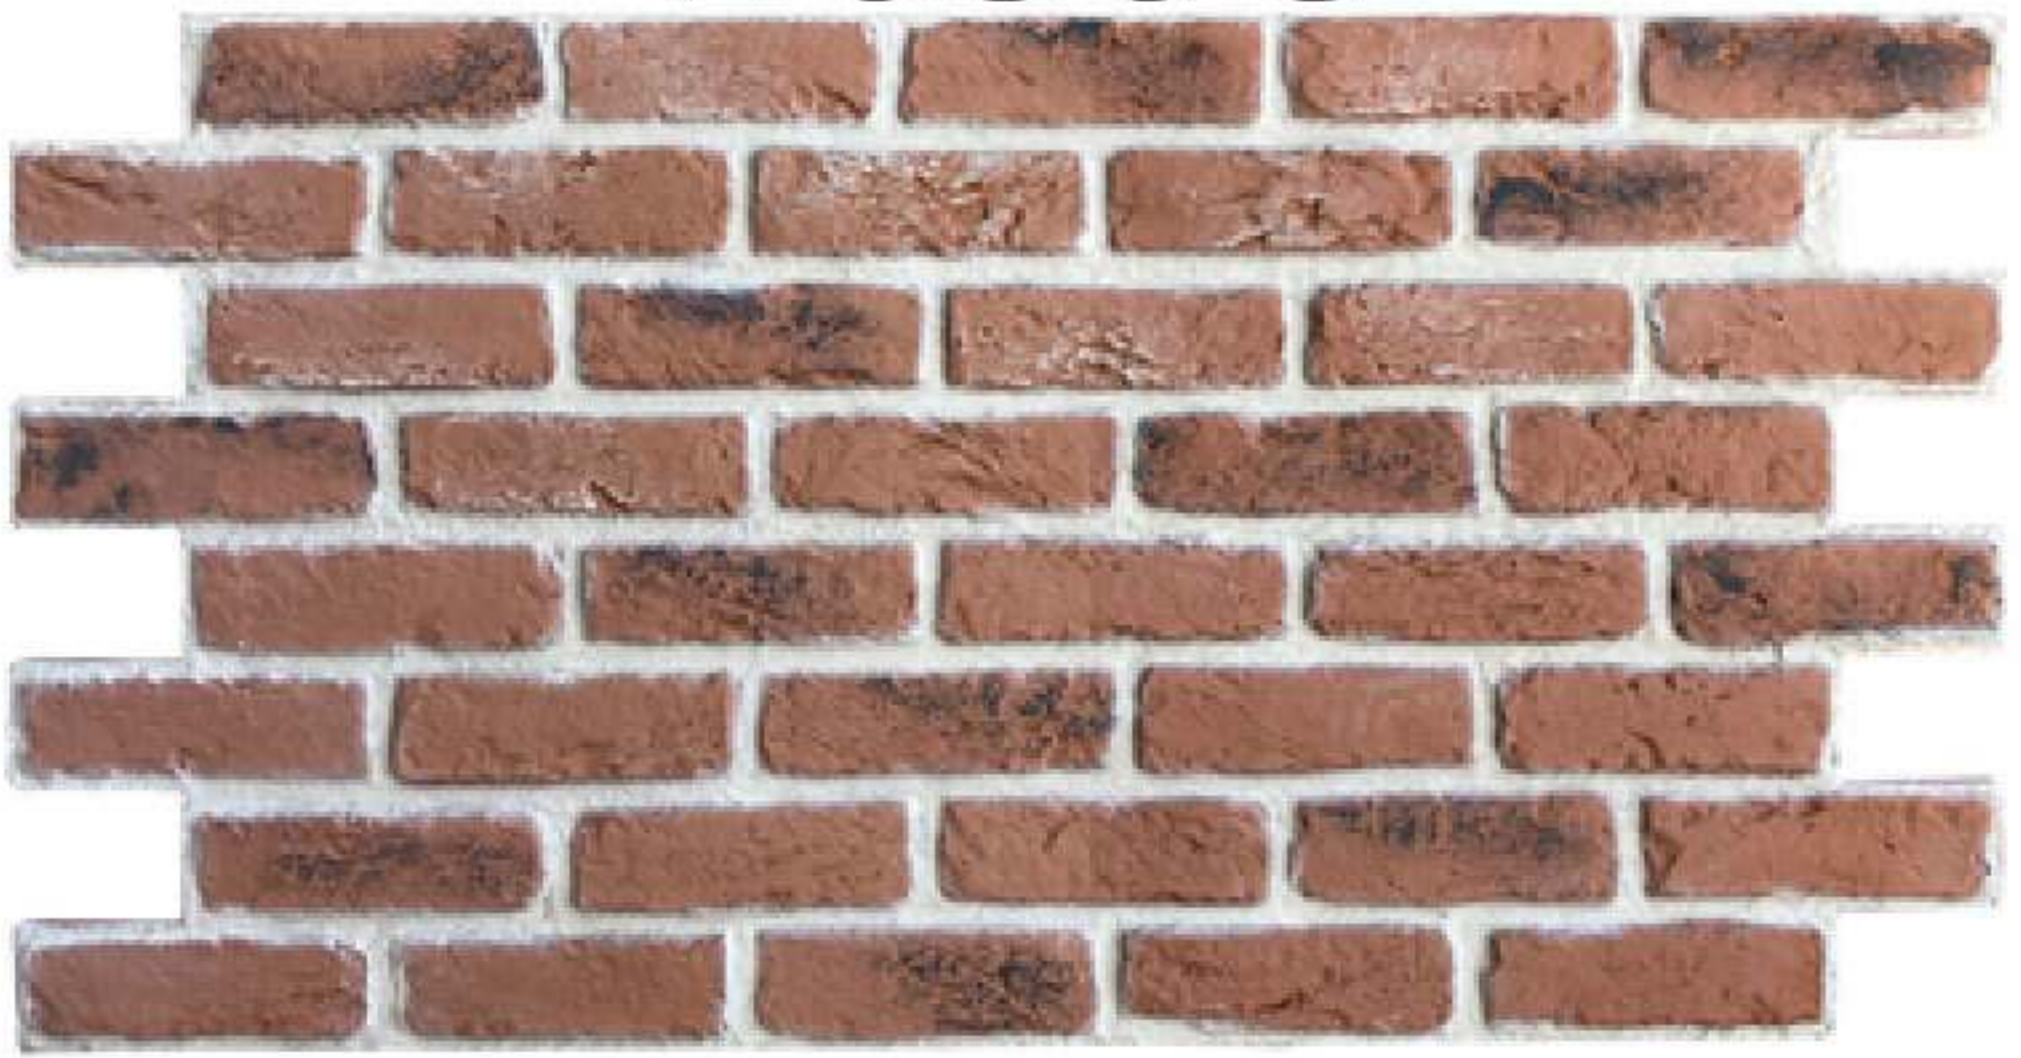

Raja

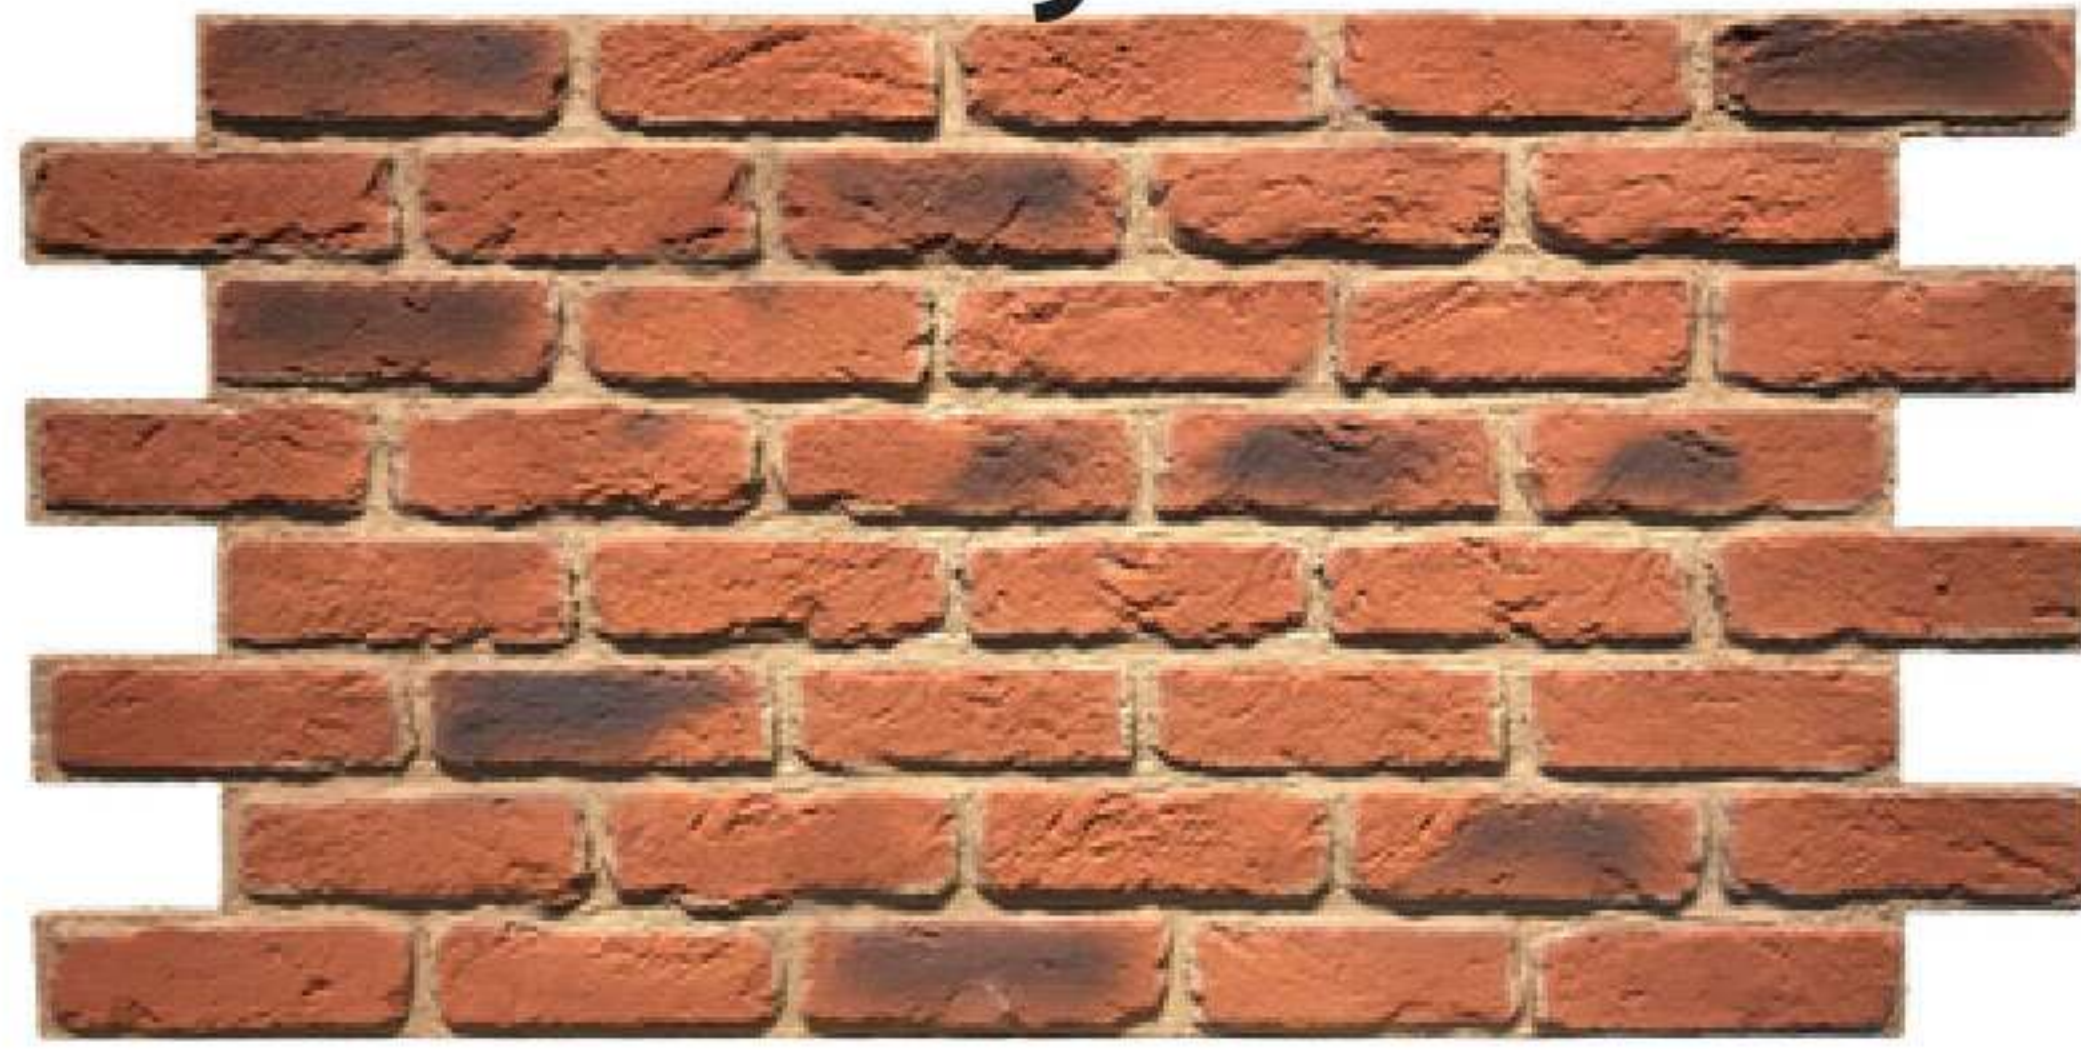

Dark Rustic



New Marron



Grey




Suelo






Ladrillo Vintage

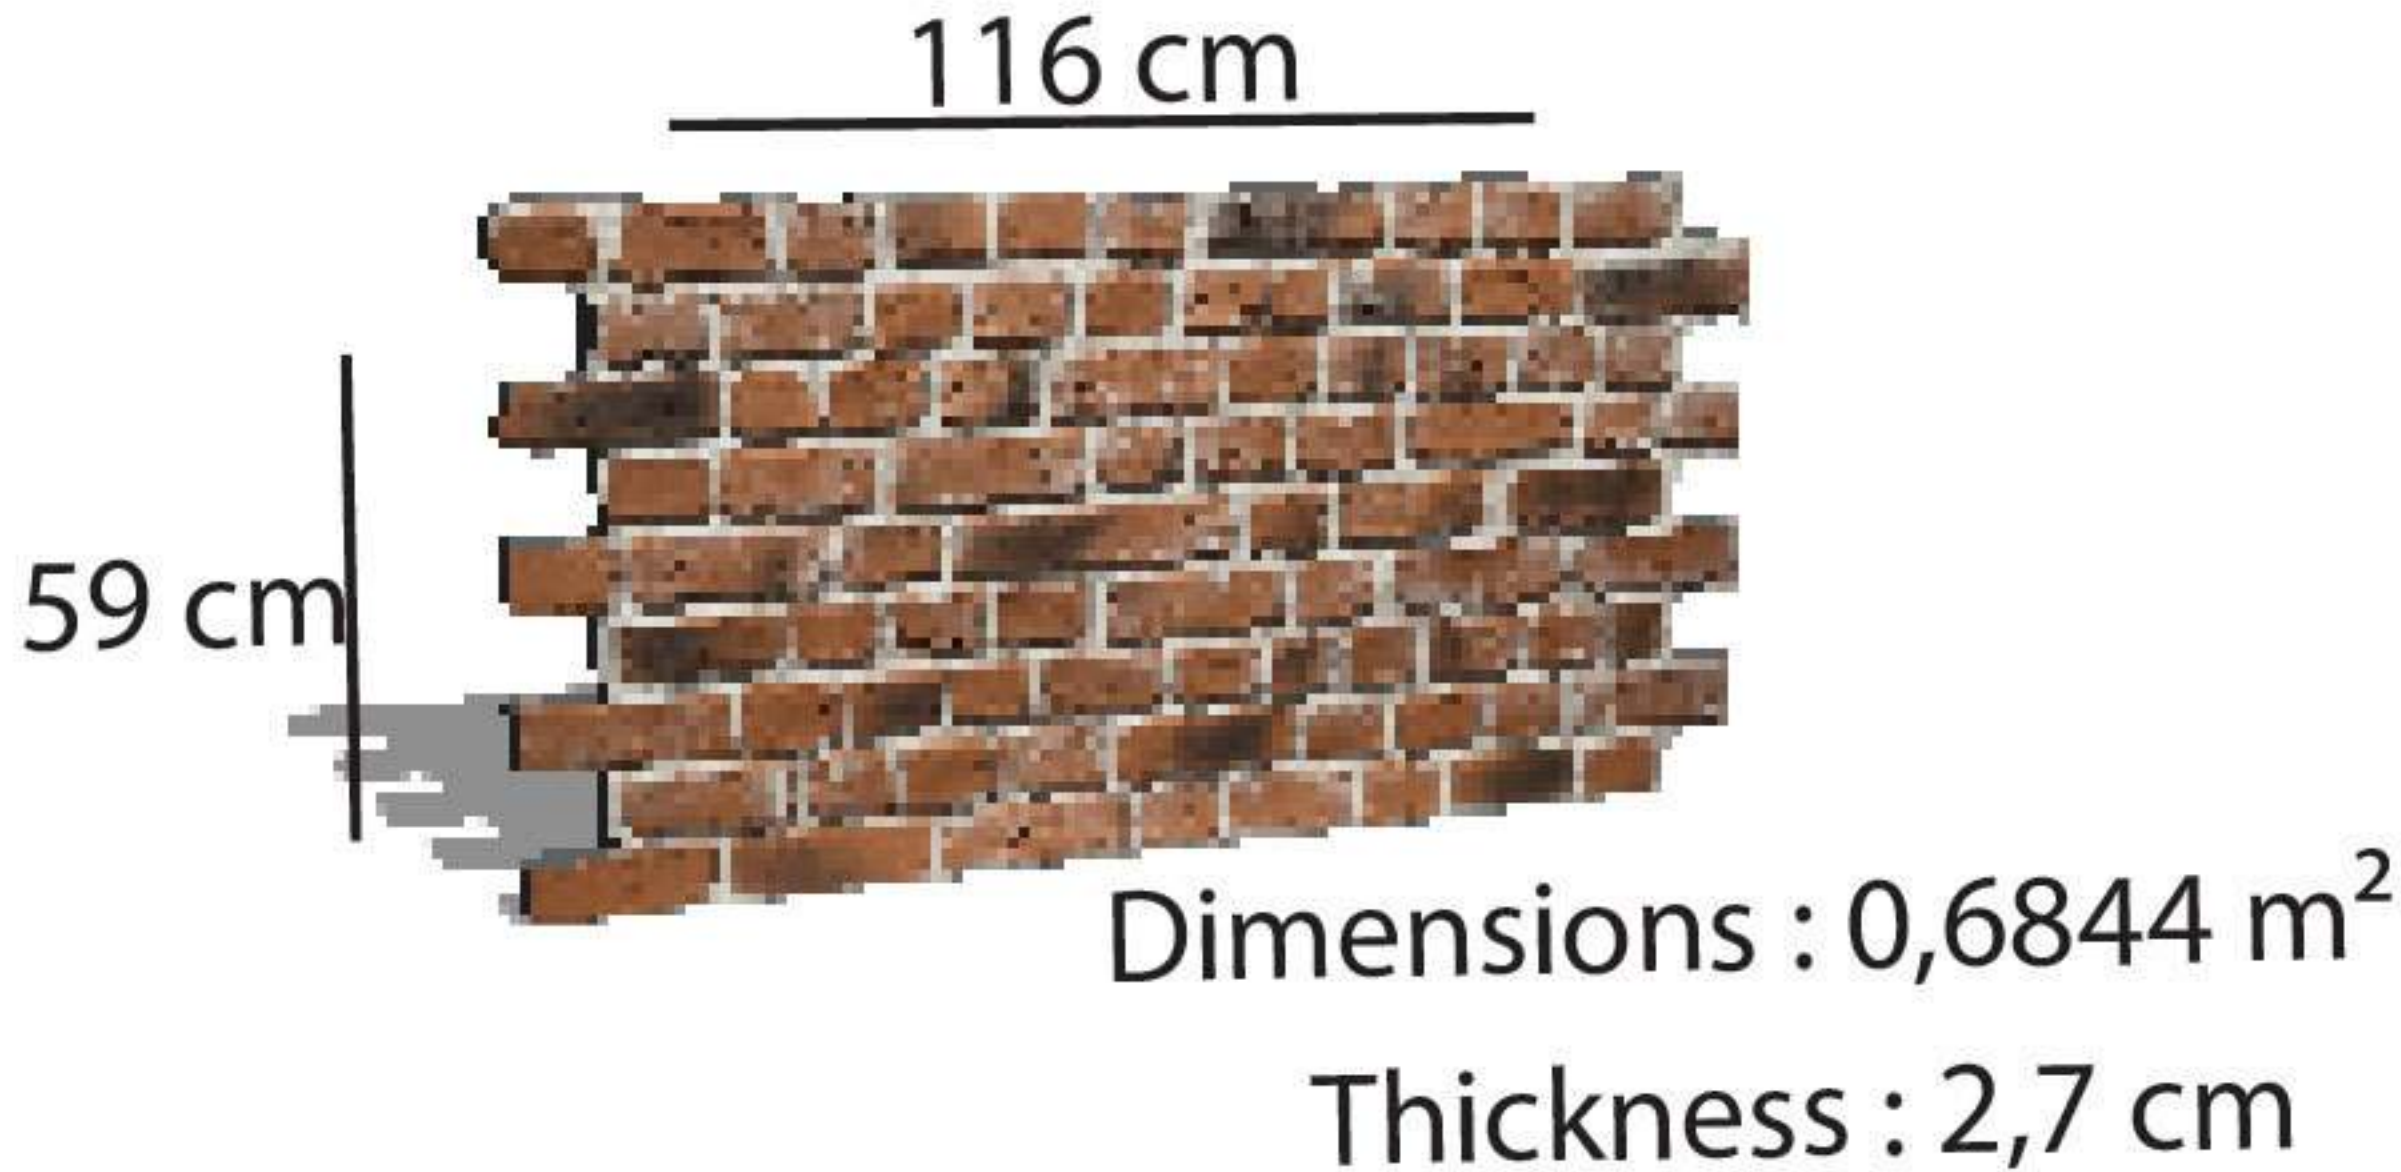


Negra




Rustic

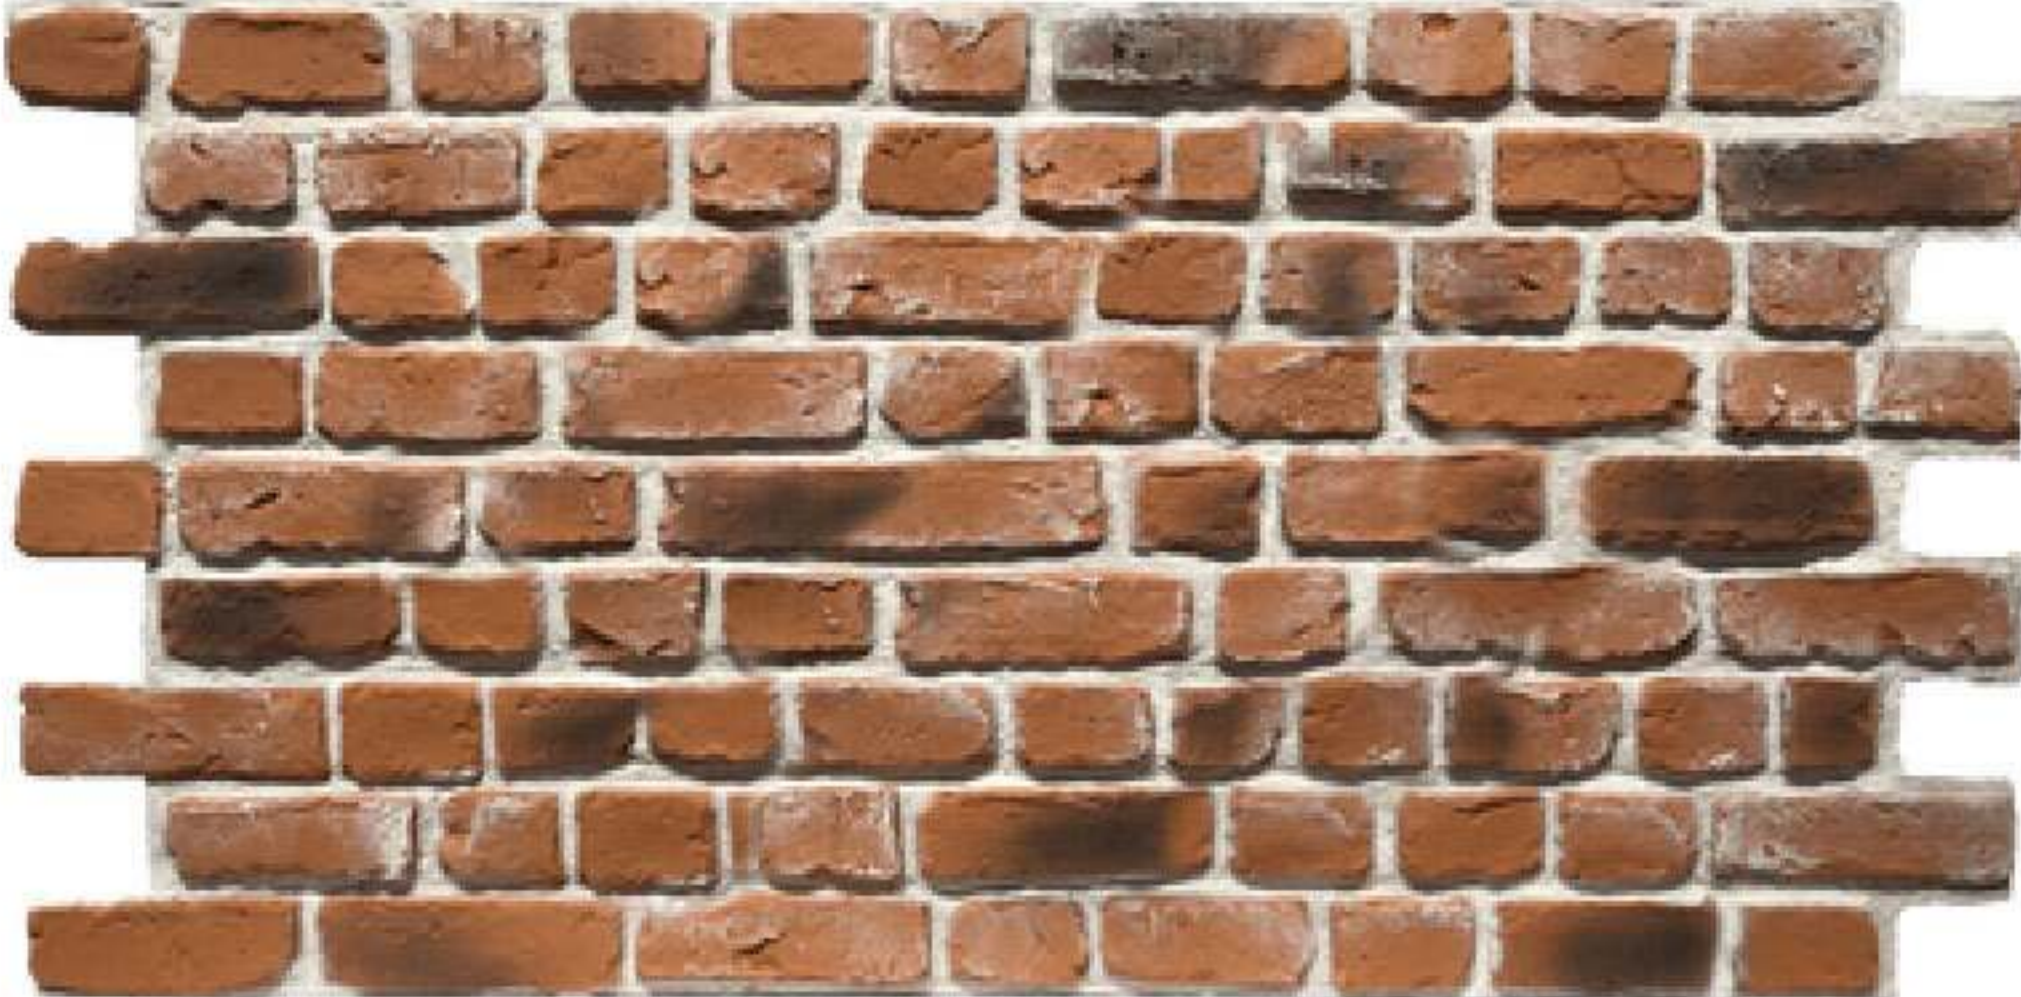


Blancura

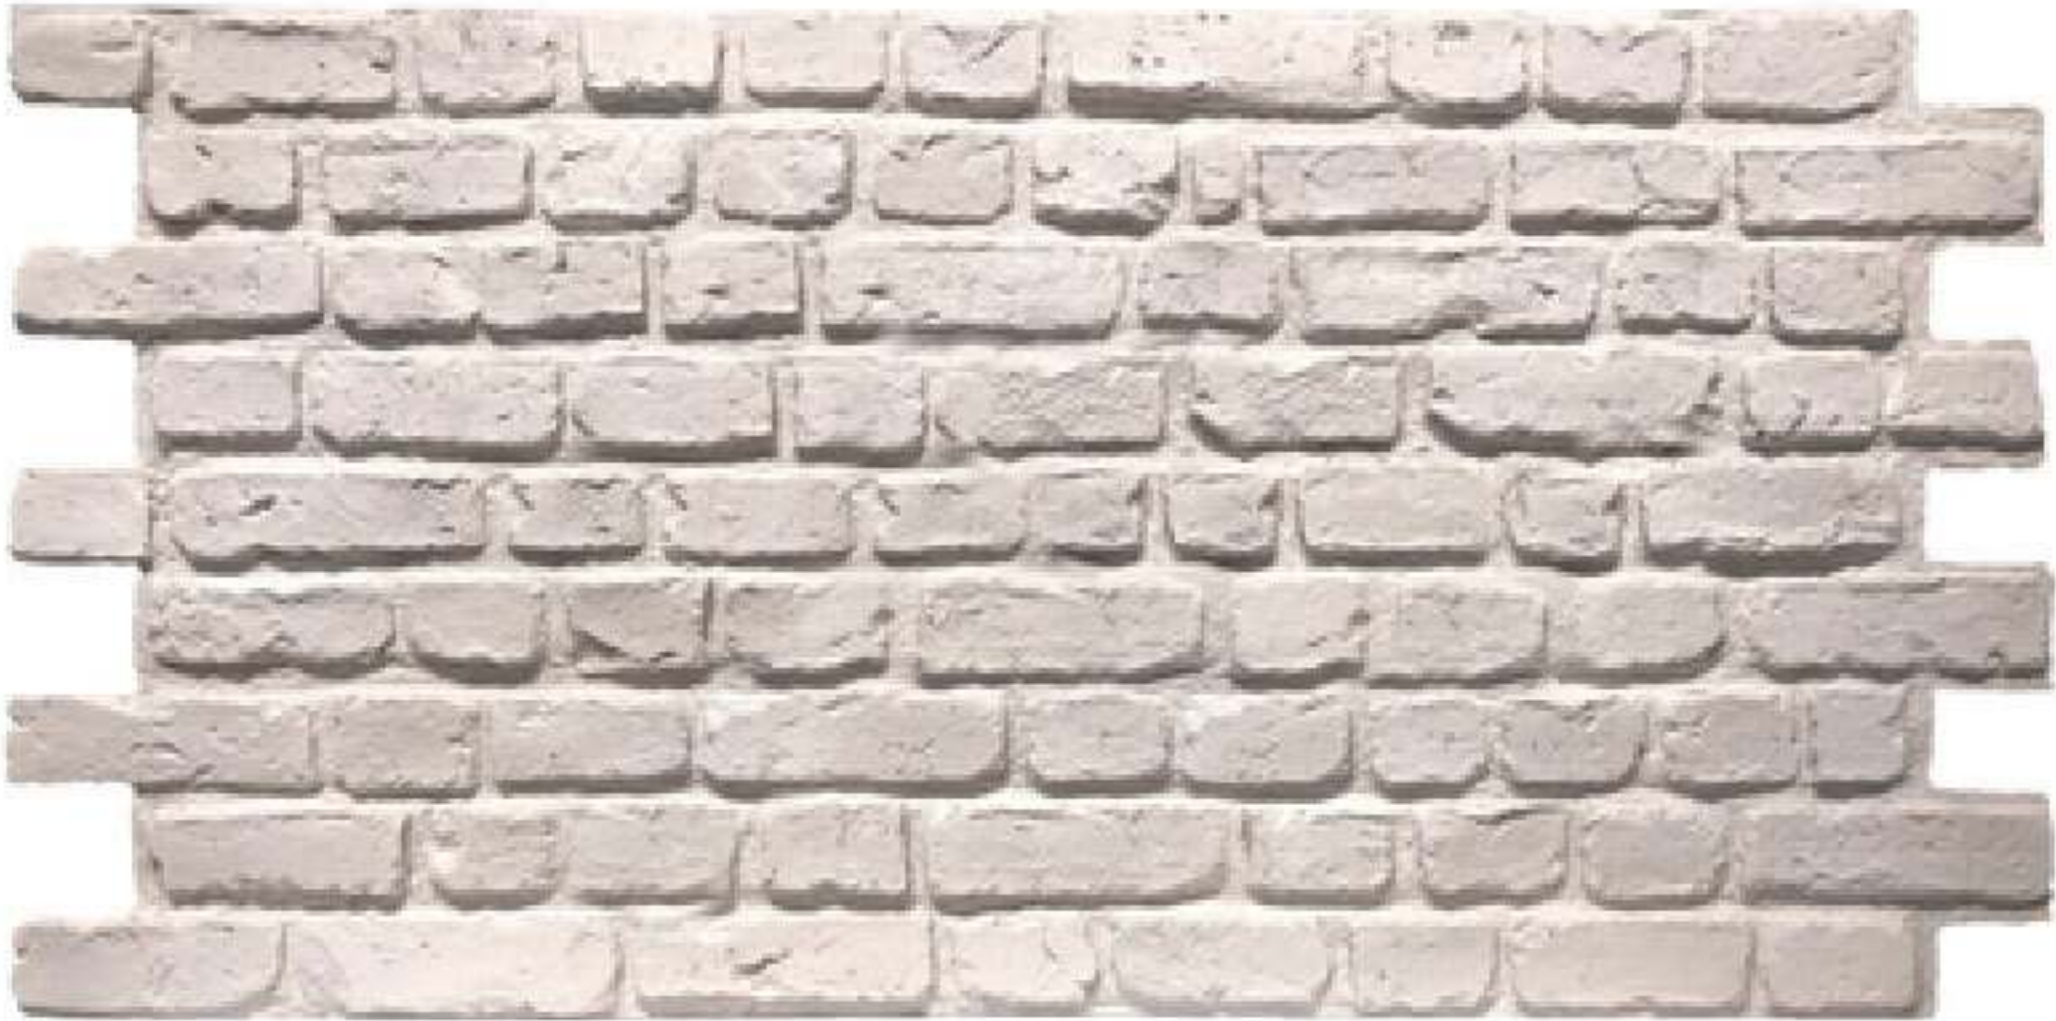


Raja

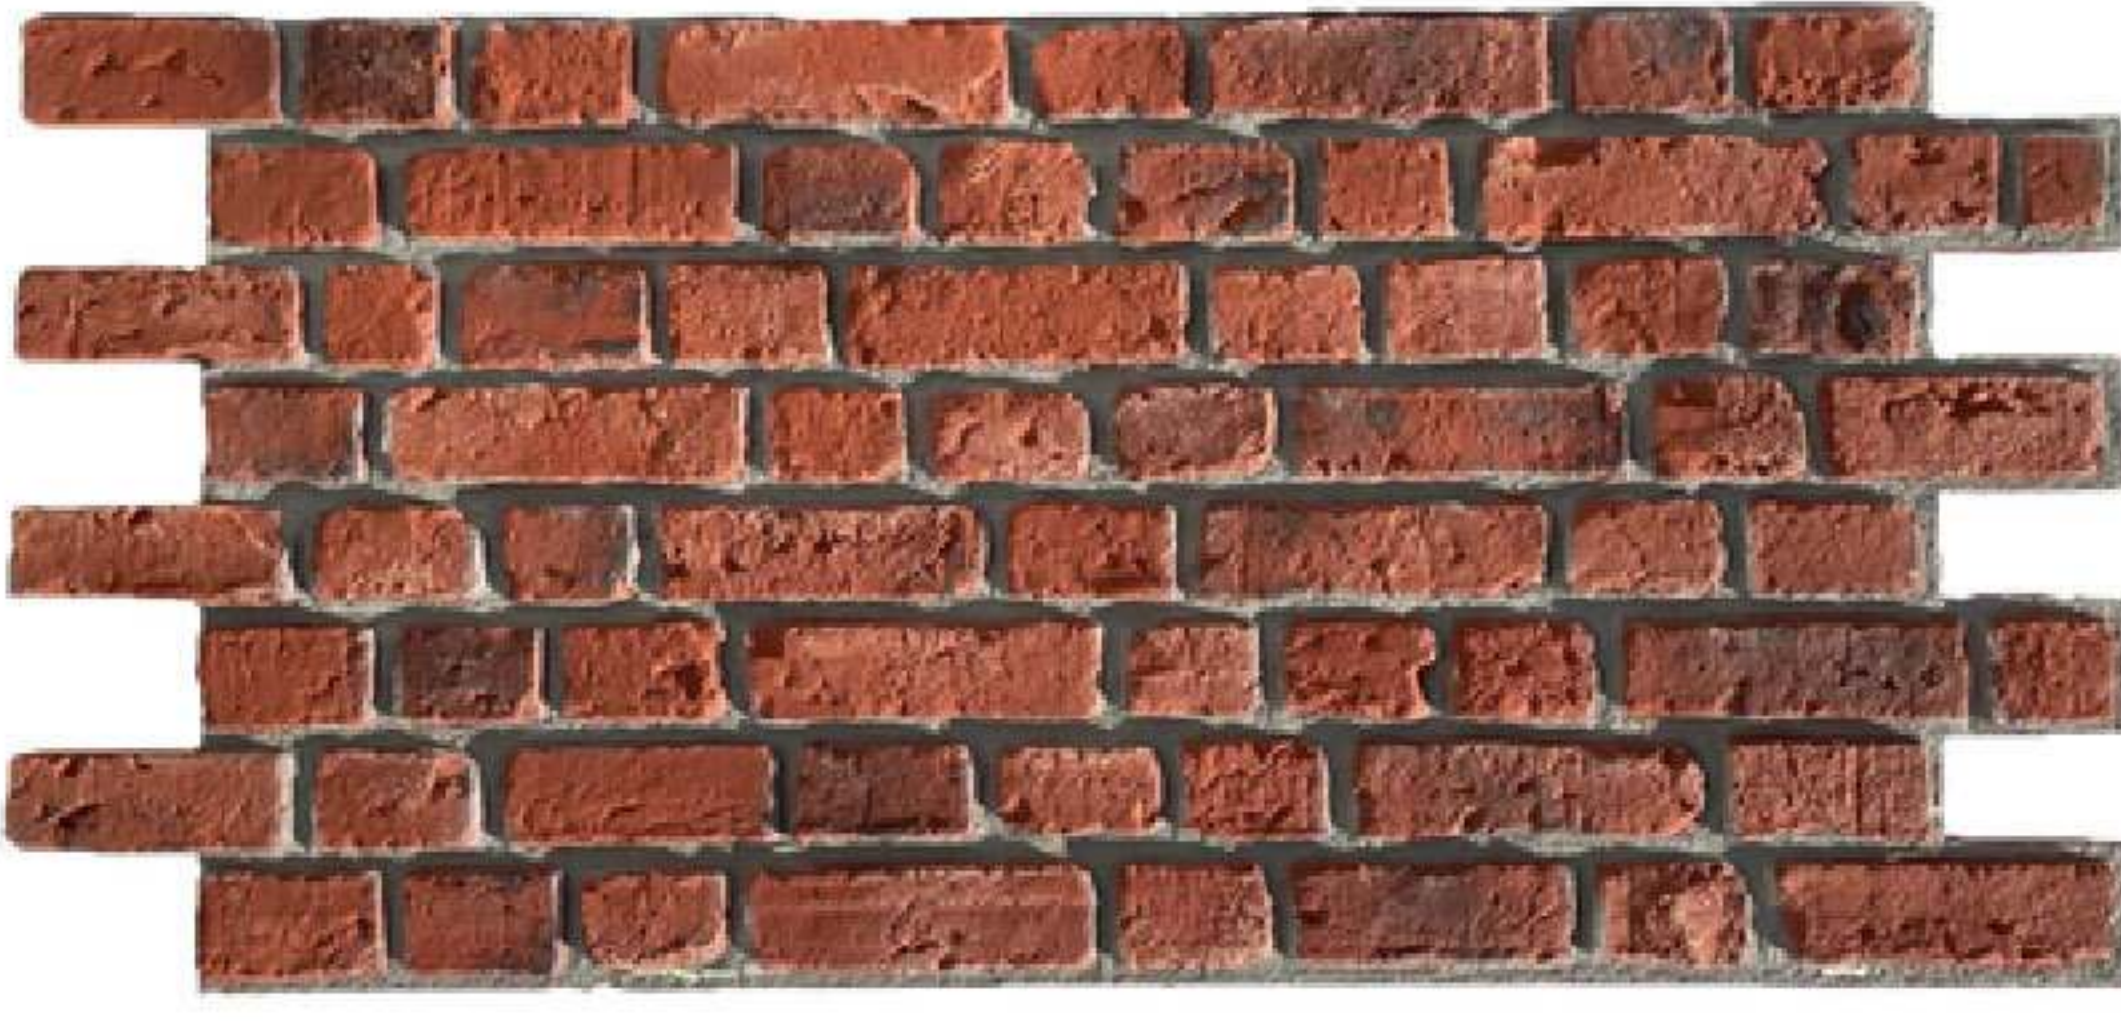


Suelo

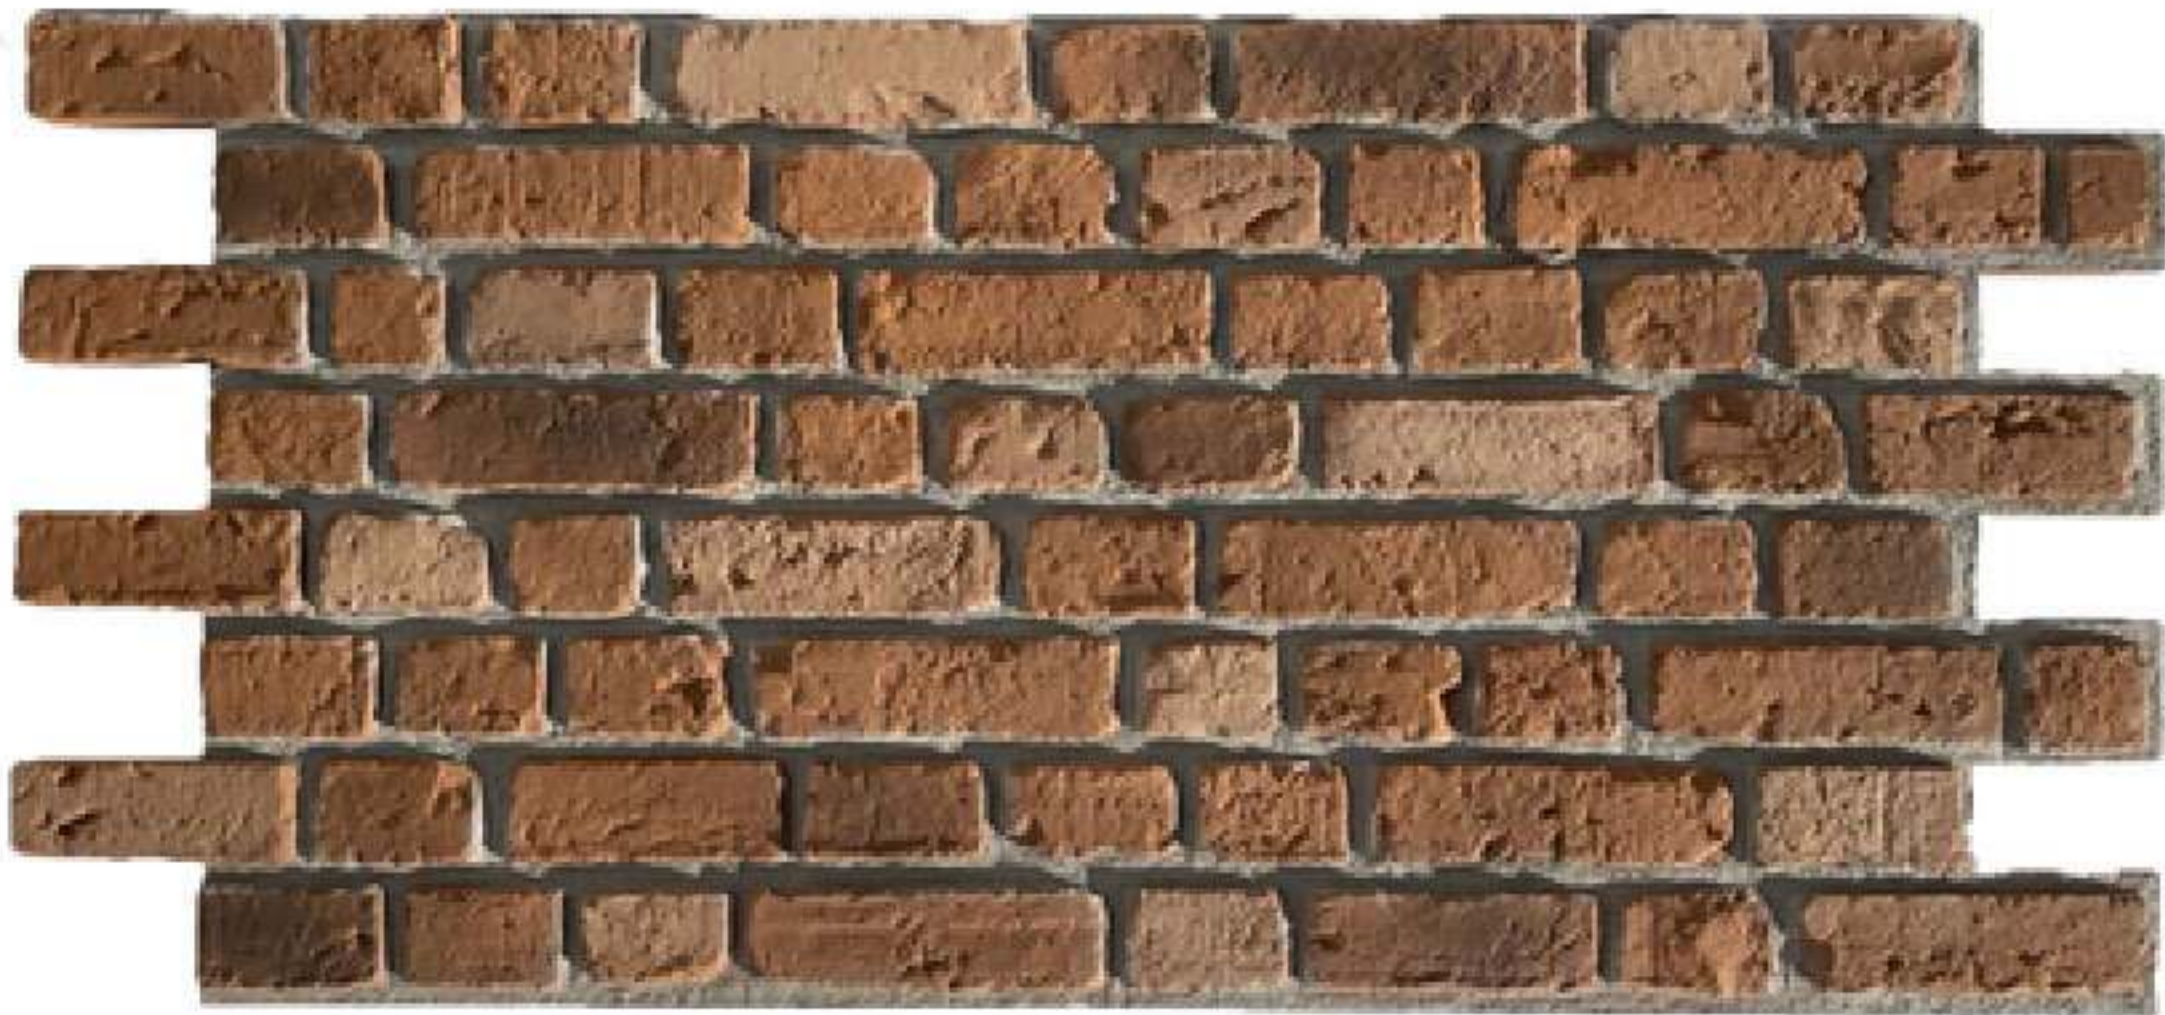

Dark Rustic

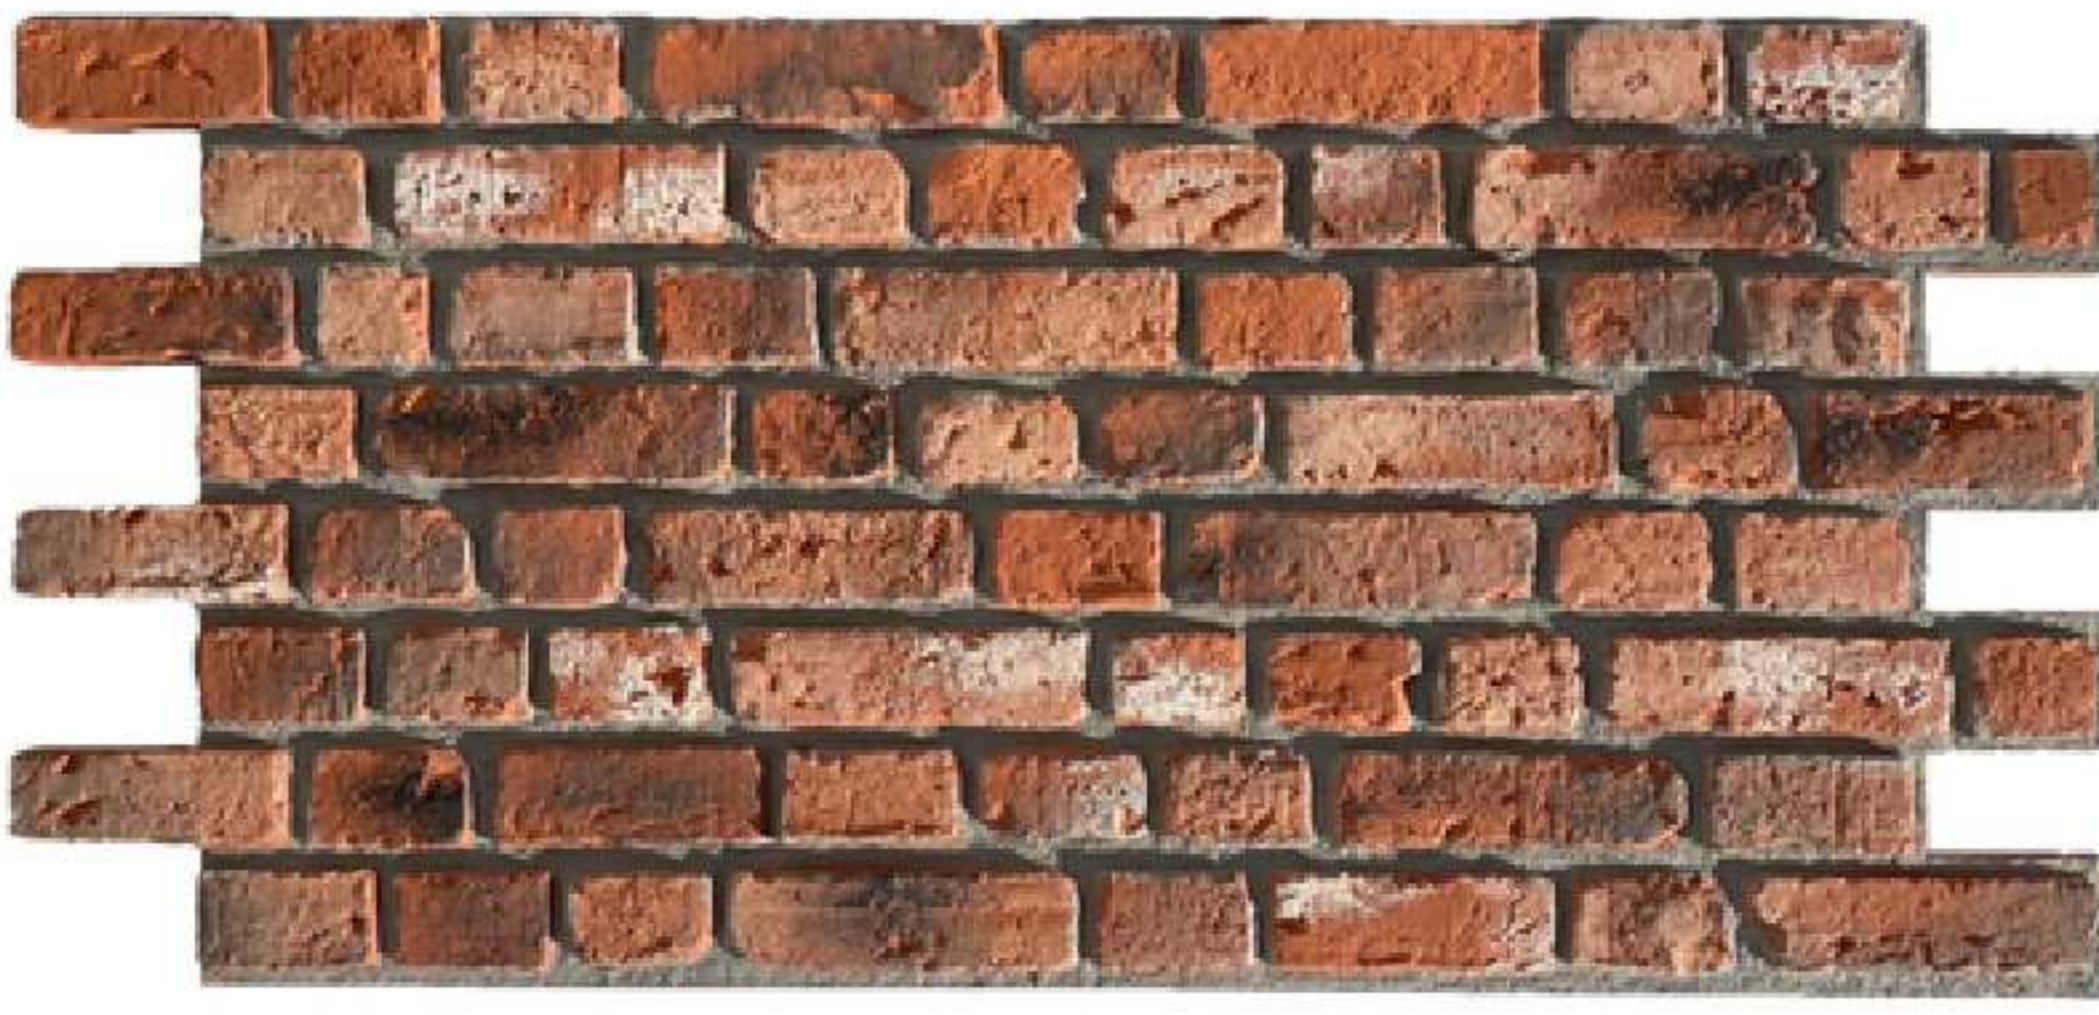

Vintage Retro

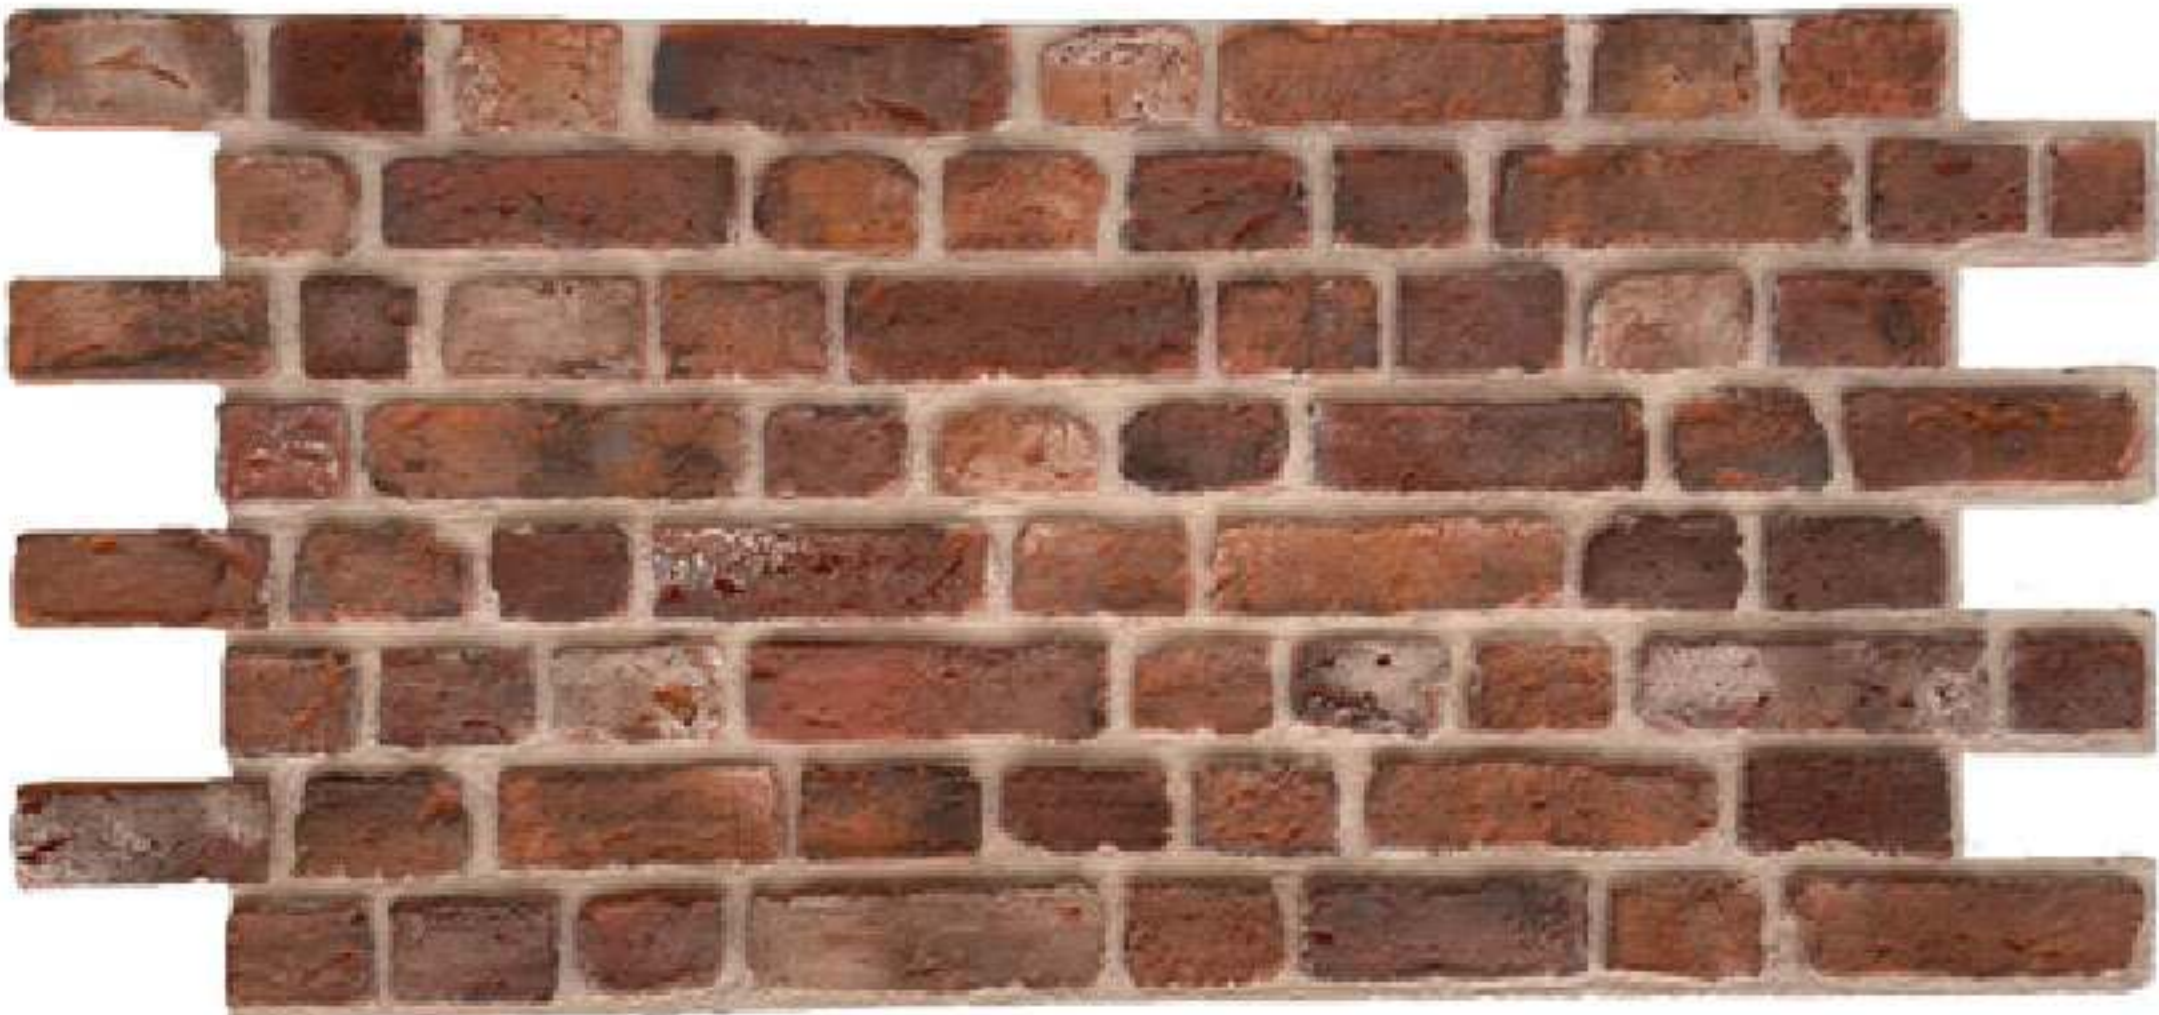



Ardesia



Dimensions : 0,6844 m²

Thickness : 4,4 cm

Rosso



Grey



Nero



Blancura



Ombra




Sandy





Piedra

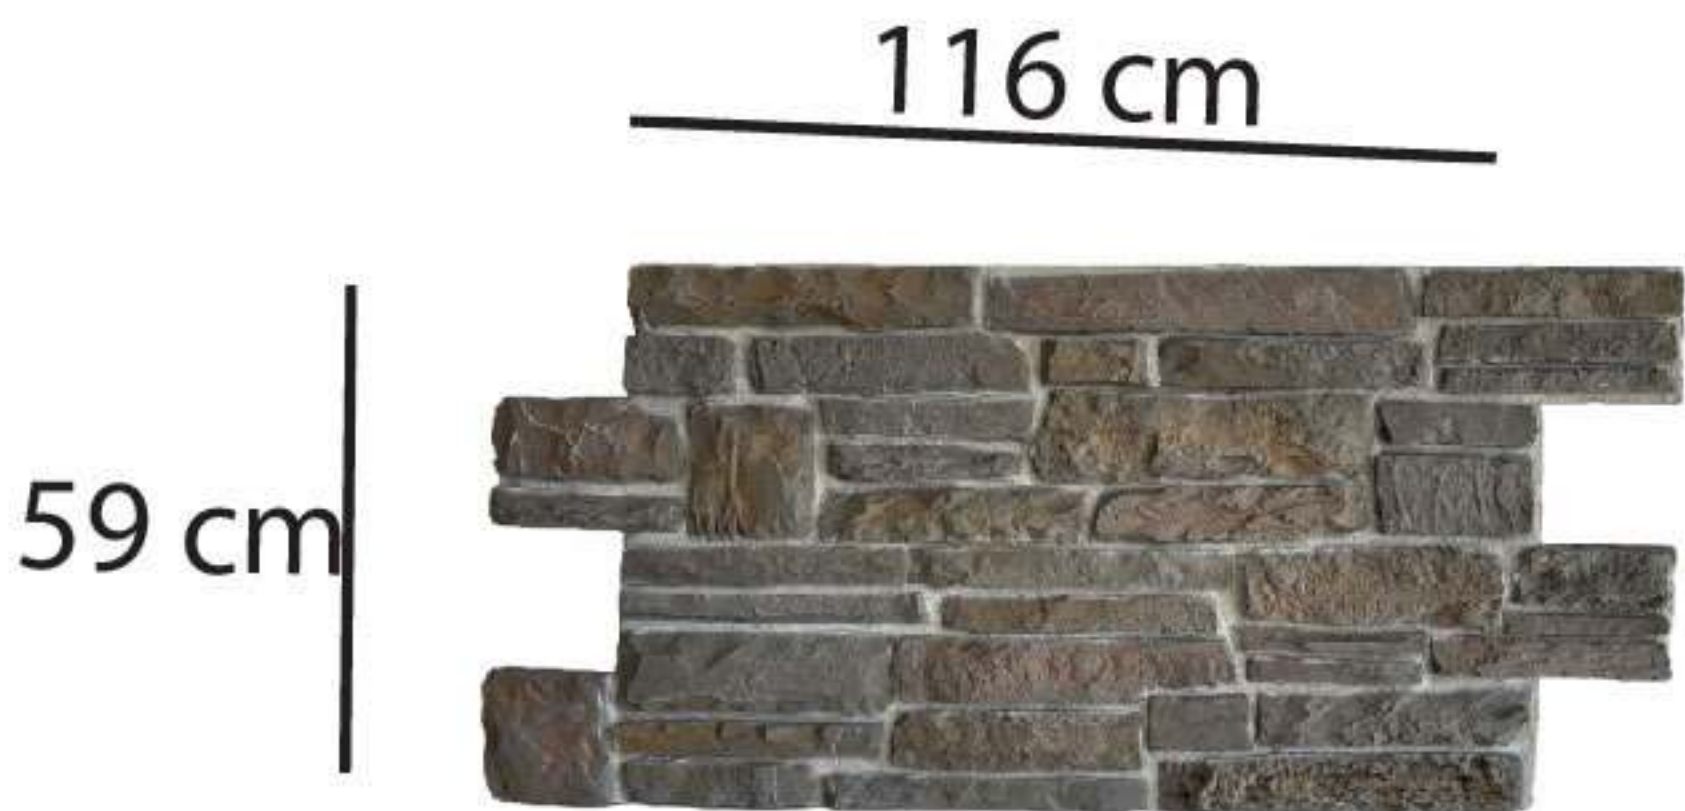

Dimensions : 0,6844 m²
Thickness : 4,4 cm

Marron



Amerillo



Blancura



Rosso




Blanca Noir





Pizarra

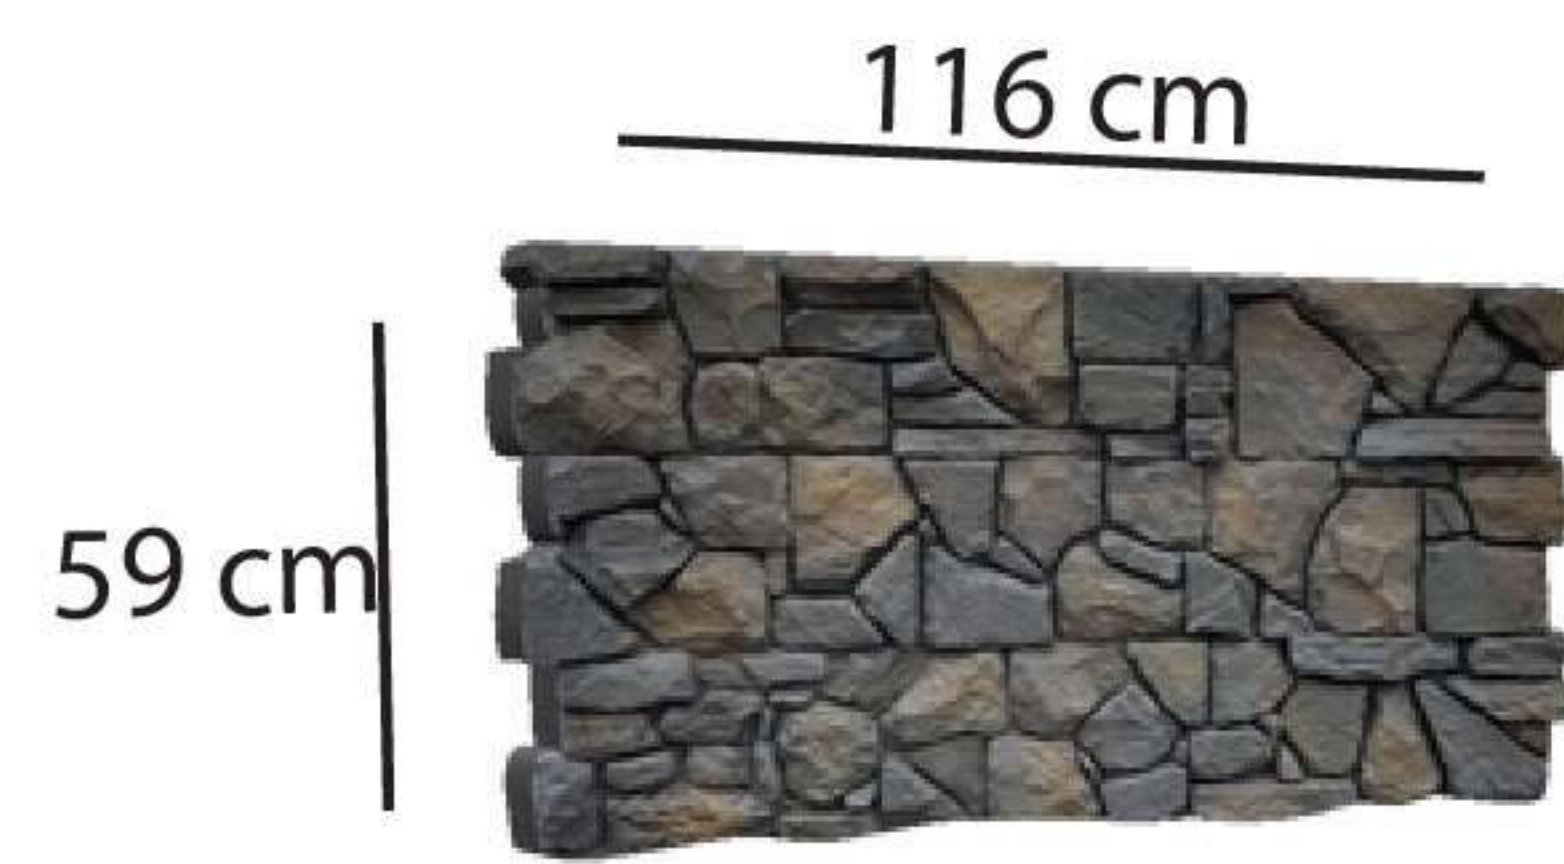

Dimensions : 0,6844 m²

Thickness : 4,4 cm

Giallo



Grey



Nero




Sandy






Hormigon

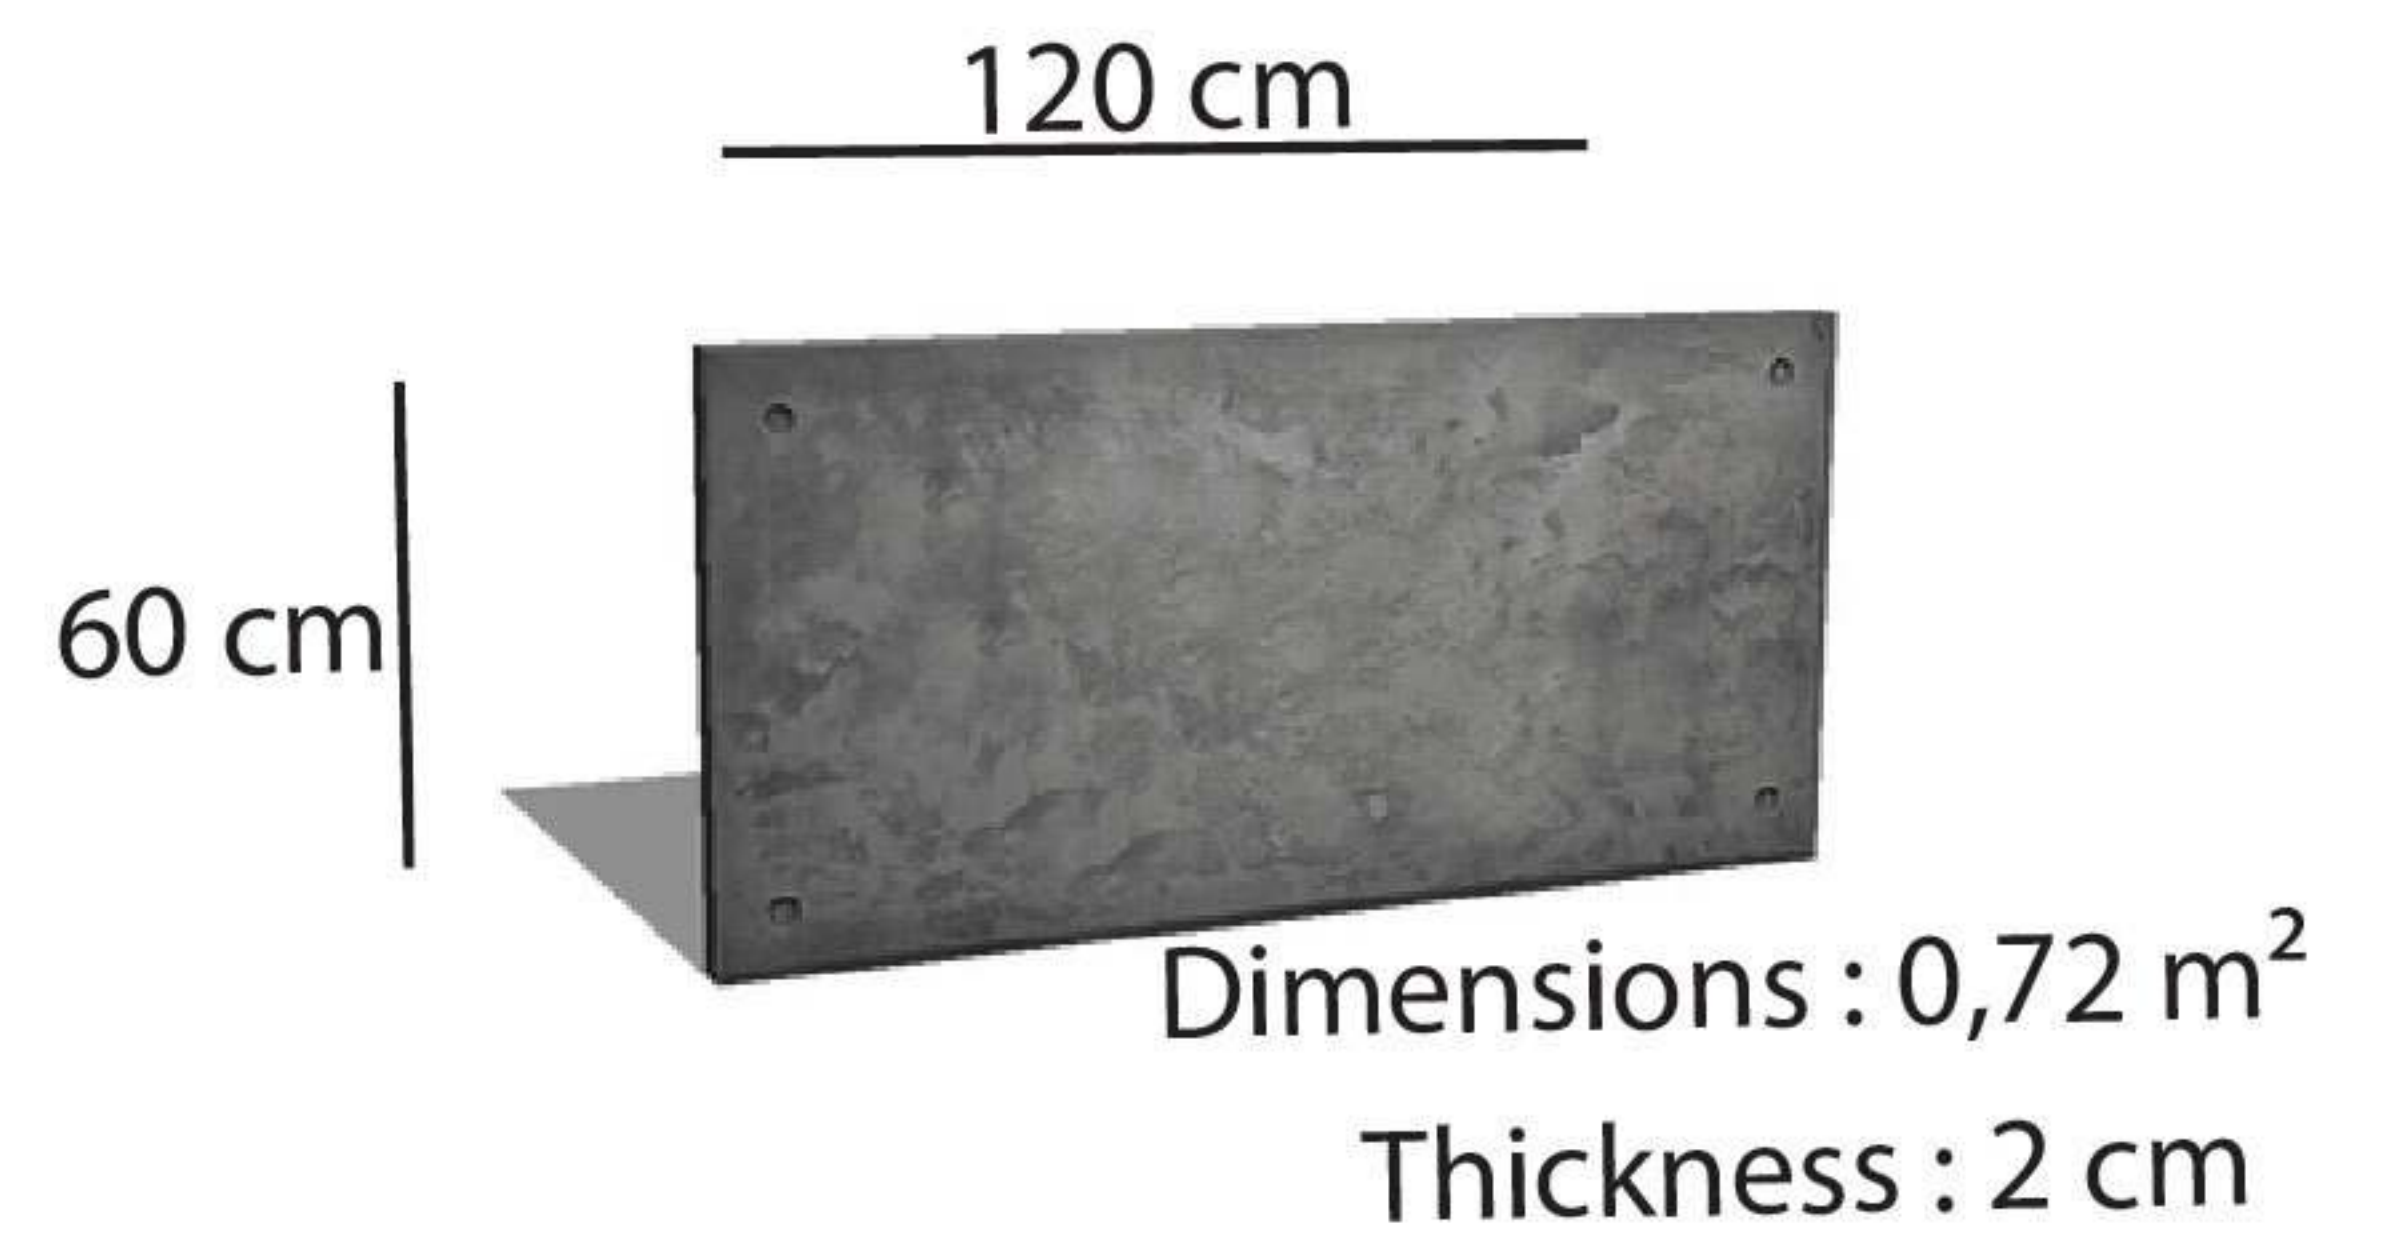

Abbronzza



Blancura

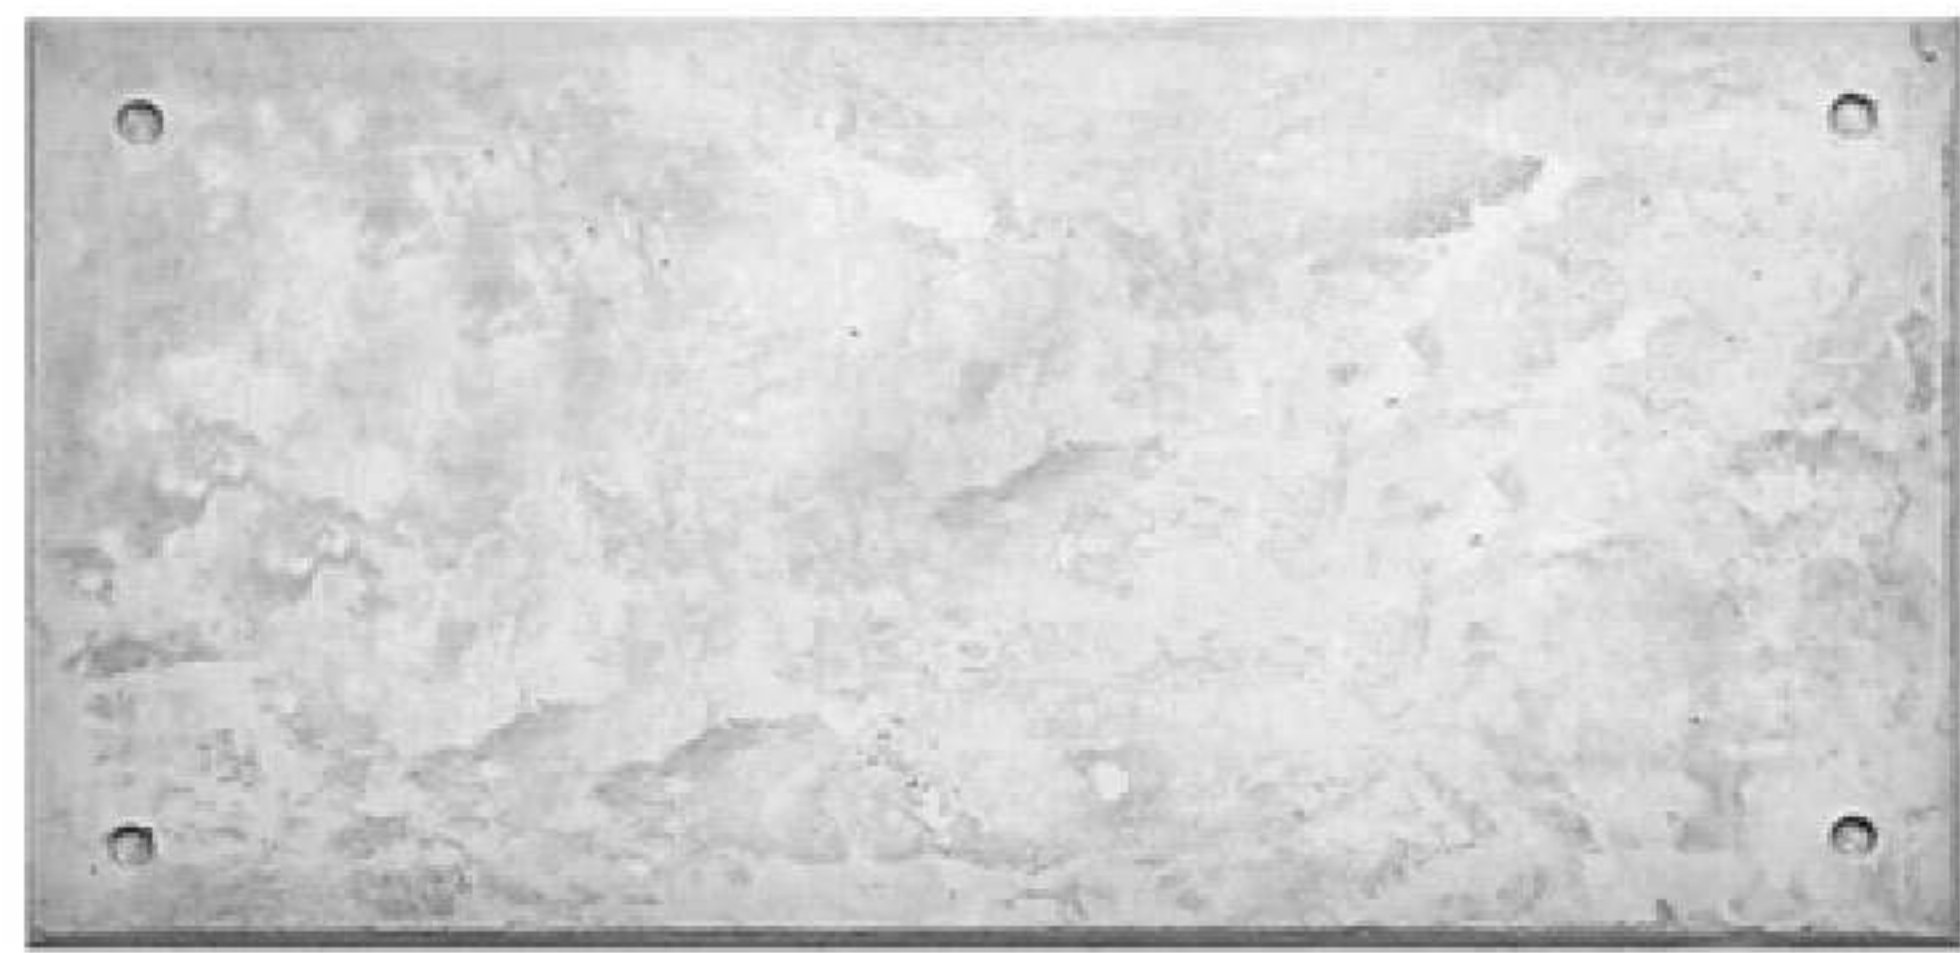

Dark Grey



Derecho



Grey




Oxid





Rocc

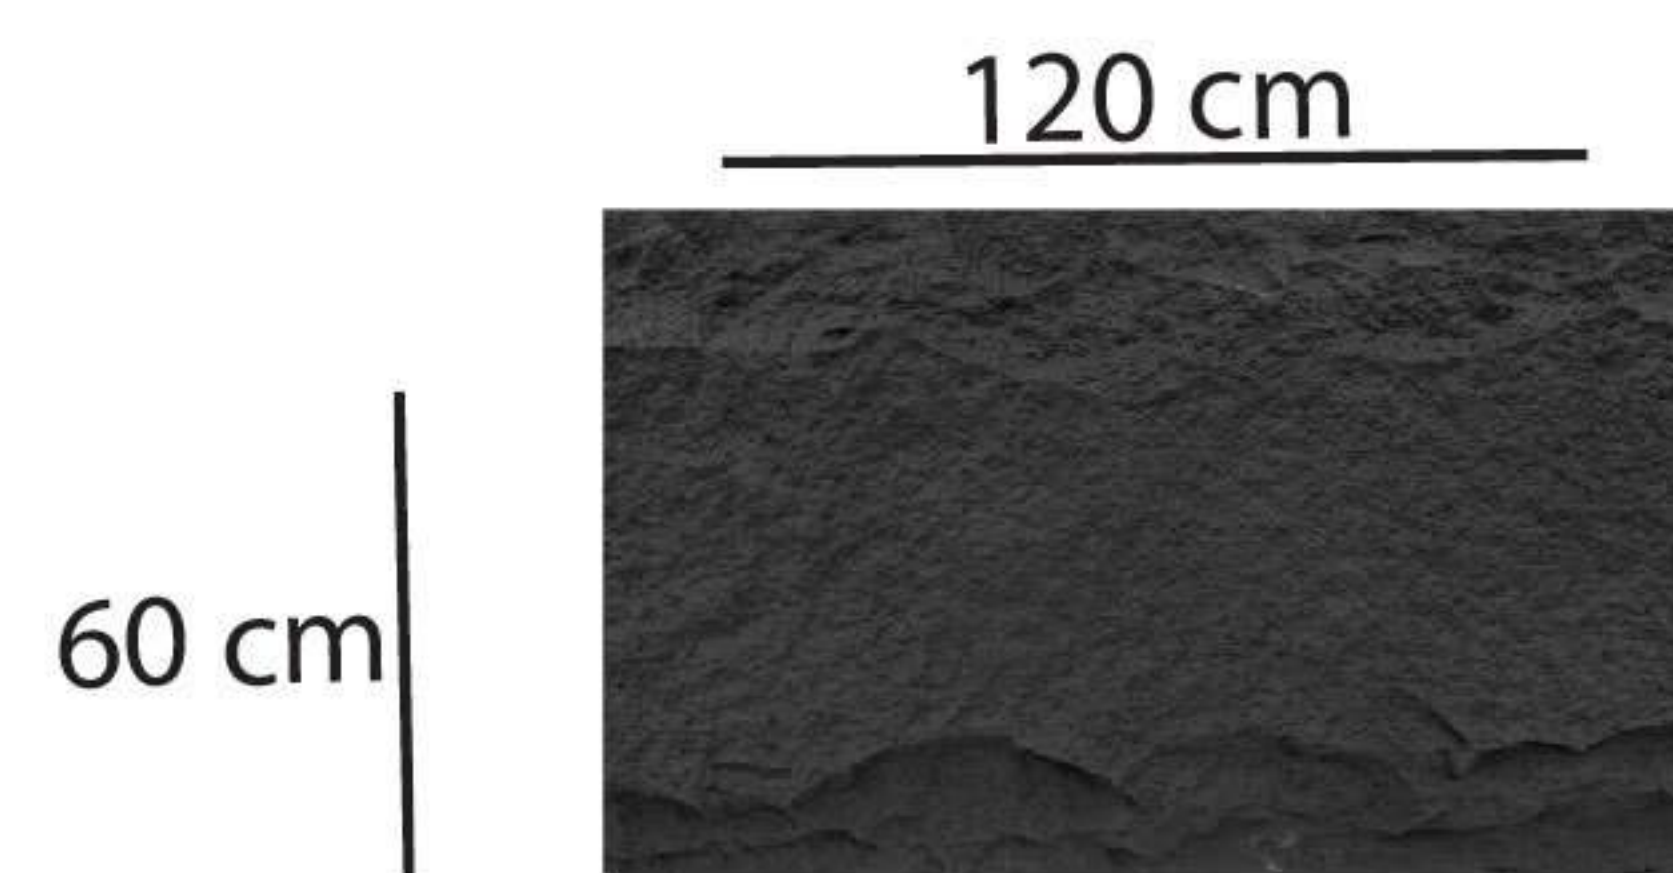

Dimensions : 0,72 m²
Thickness : 4-6 cm

Blancura



Nero



Dark Grey



Abbronzato



Sandstone




Antrasit


Dark grey

Sandstone


Blancura

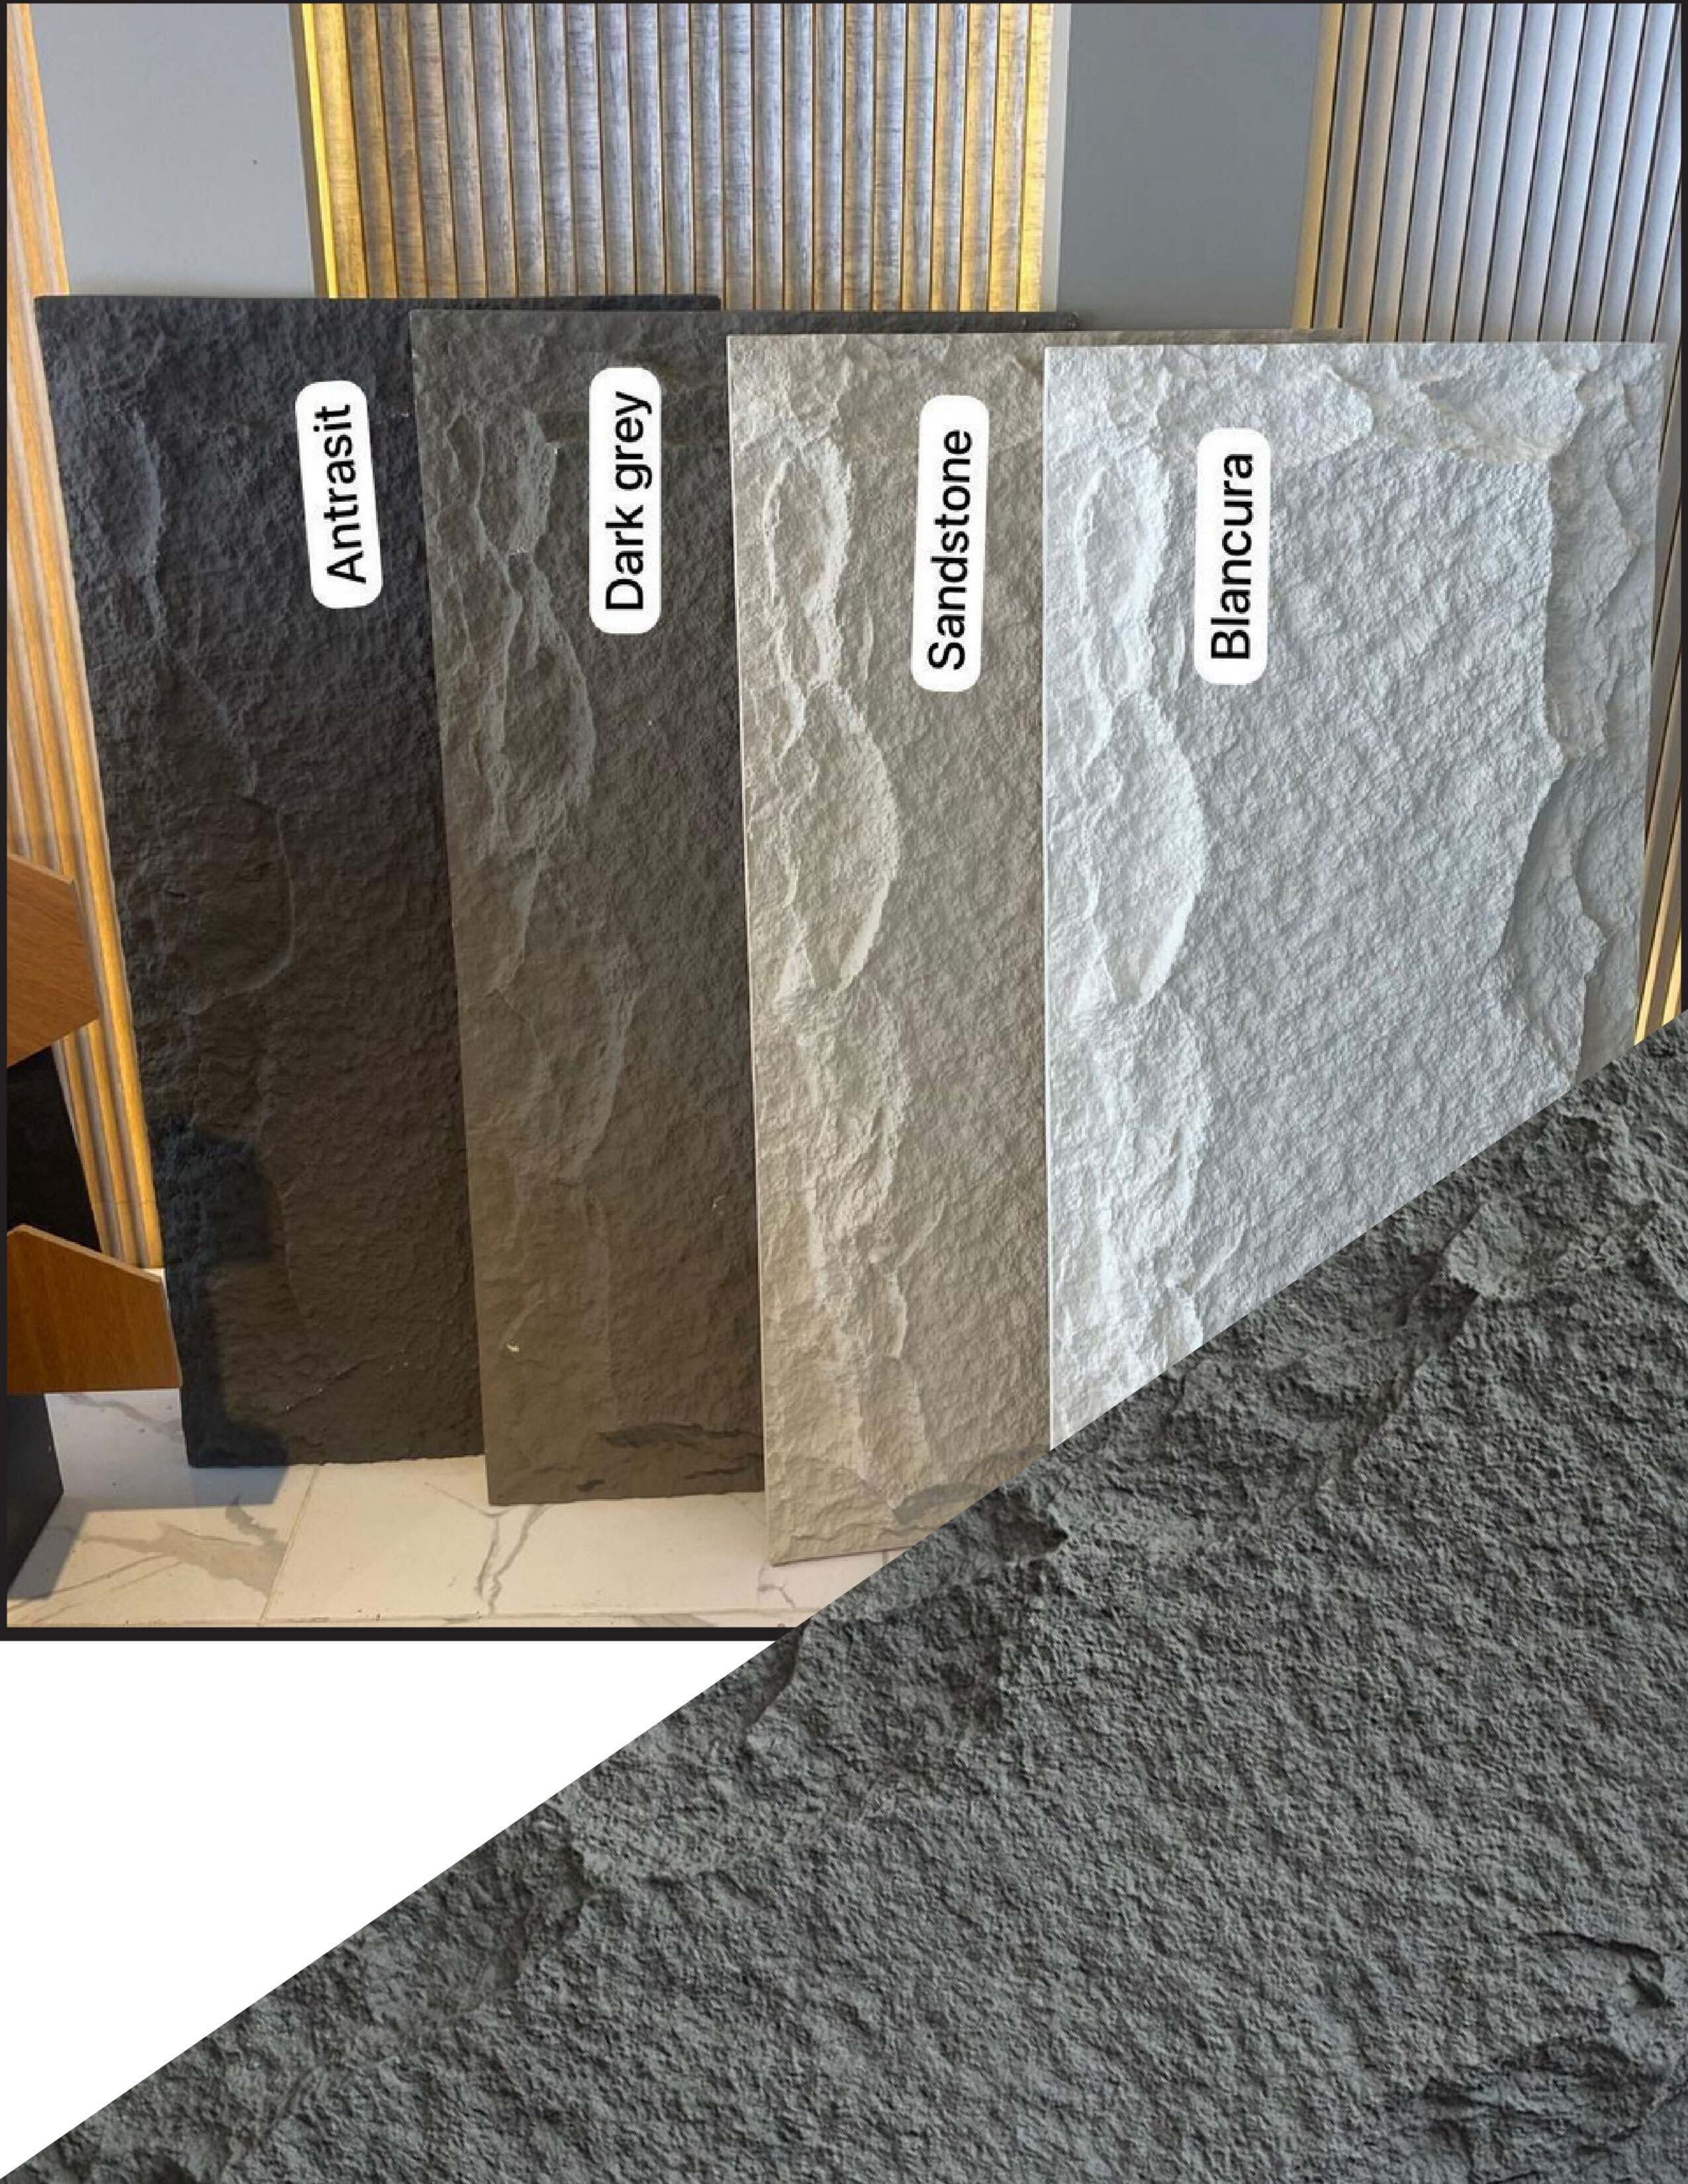



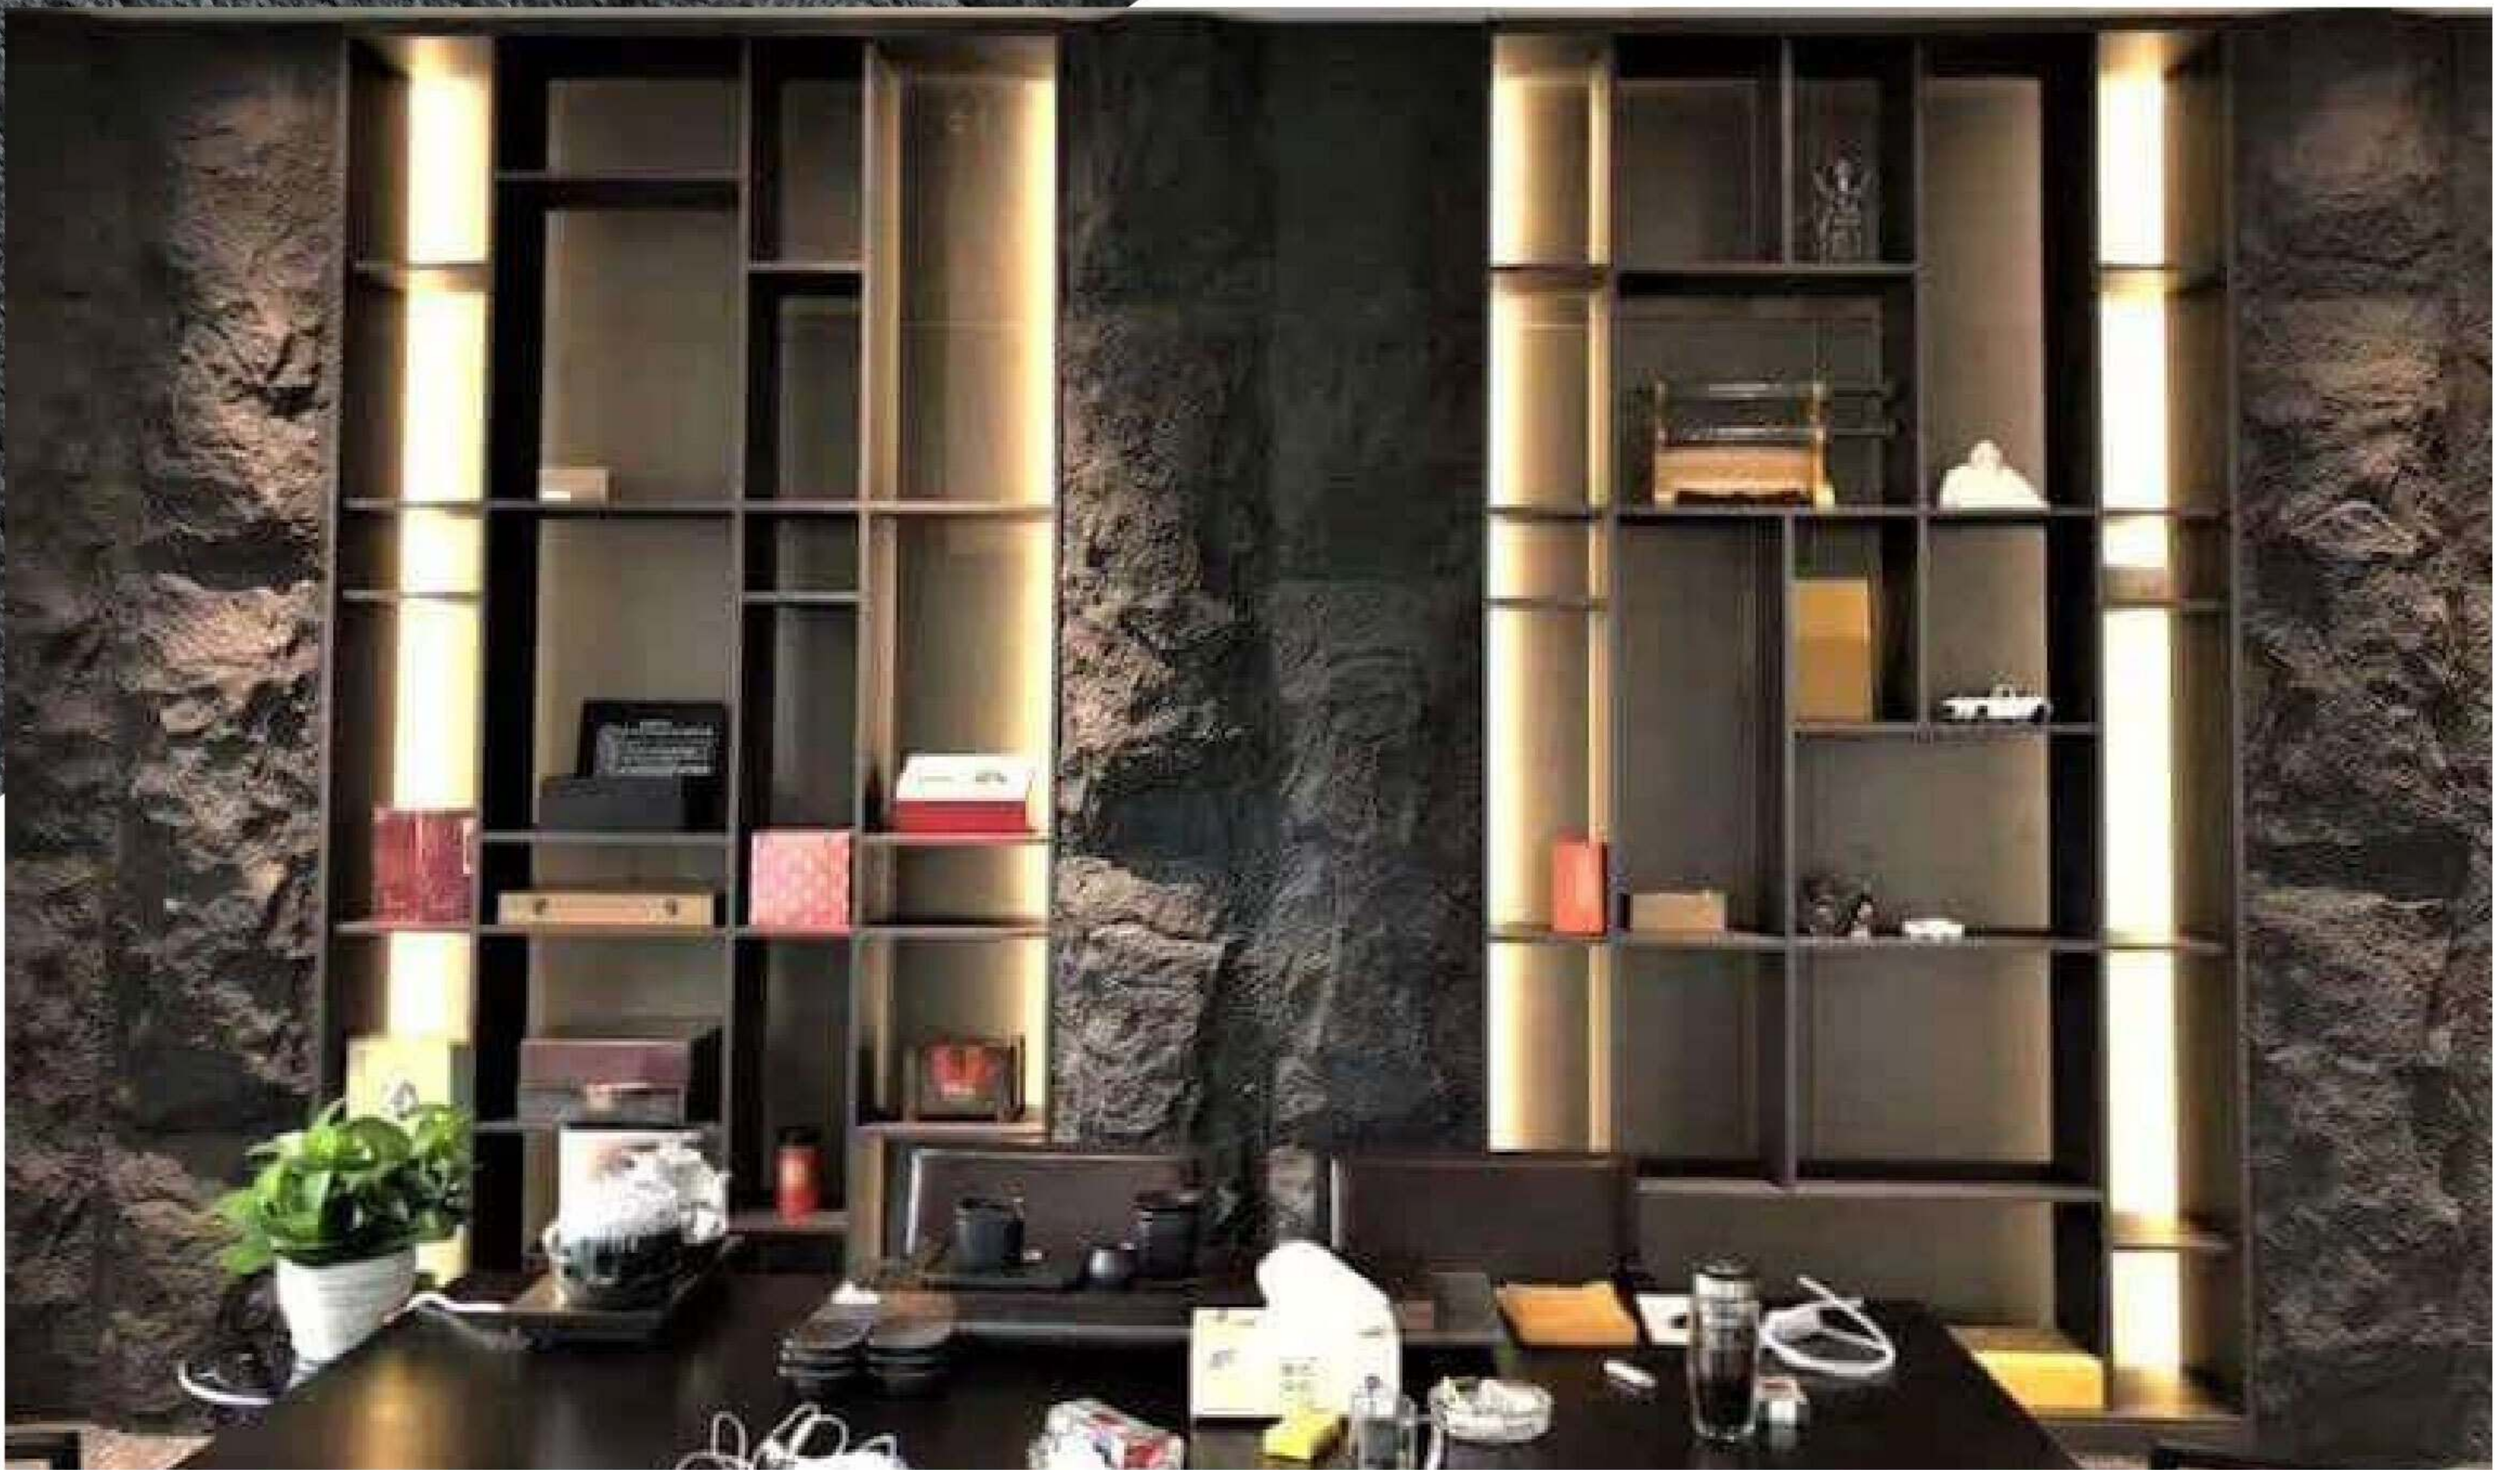

Kanyon

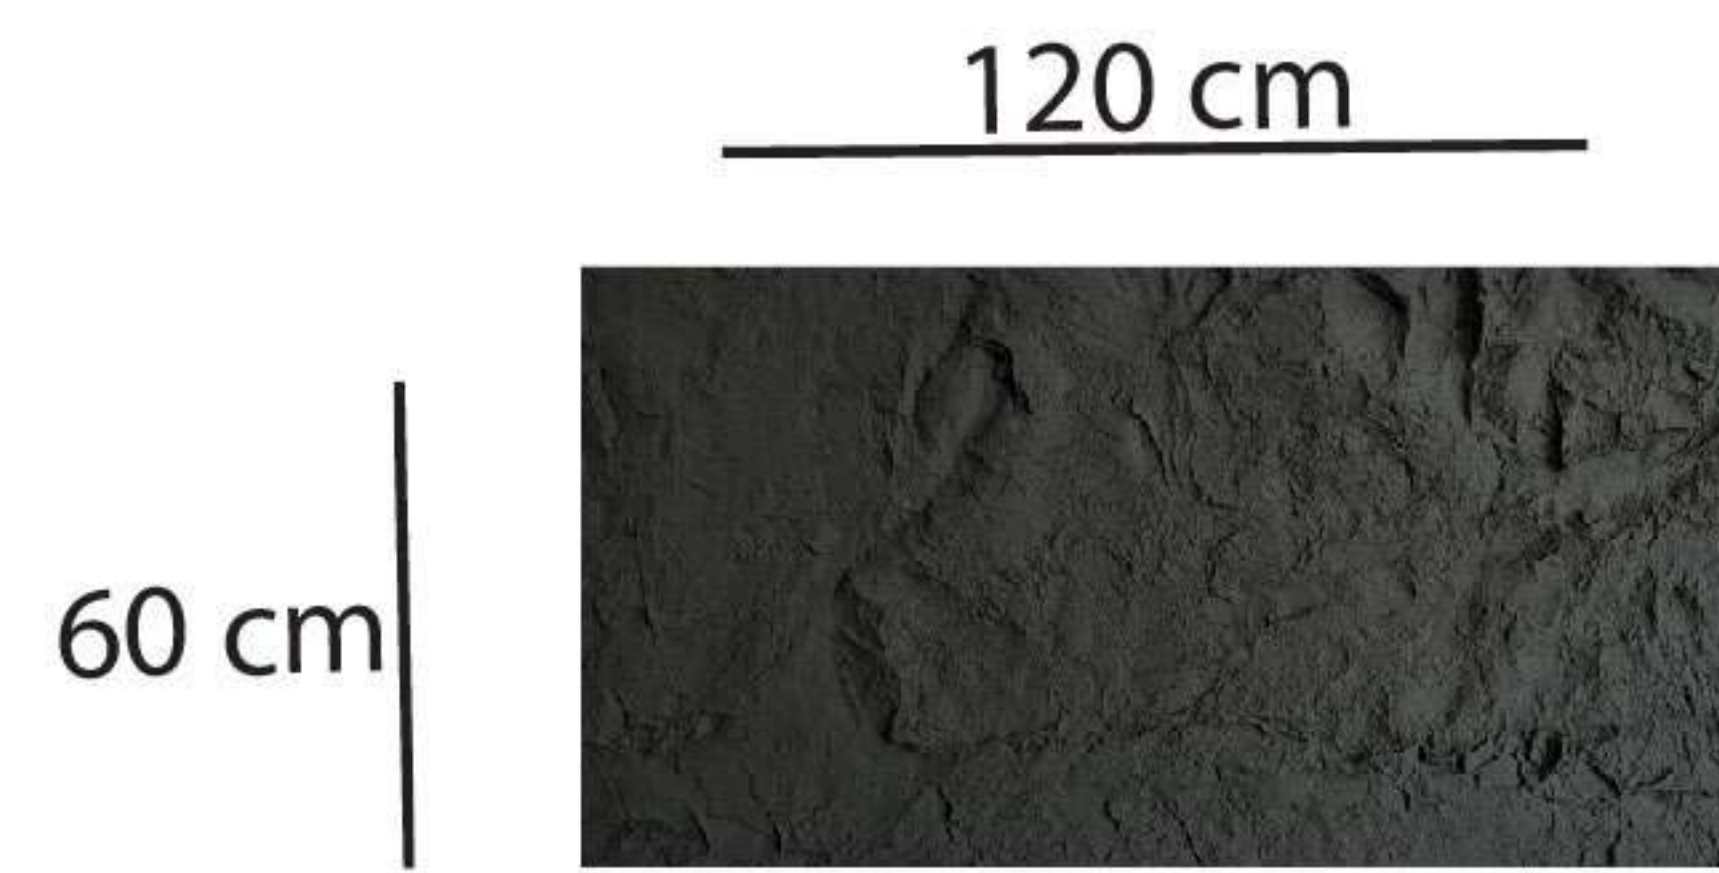

Dimensions : 0,72 m²
Thickness : 4-6 cm

Blancura




Negra




Sandstone



Beton

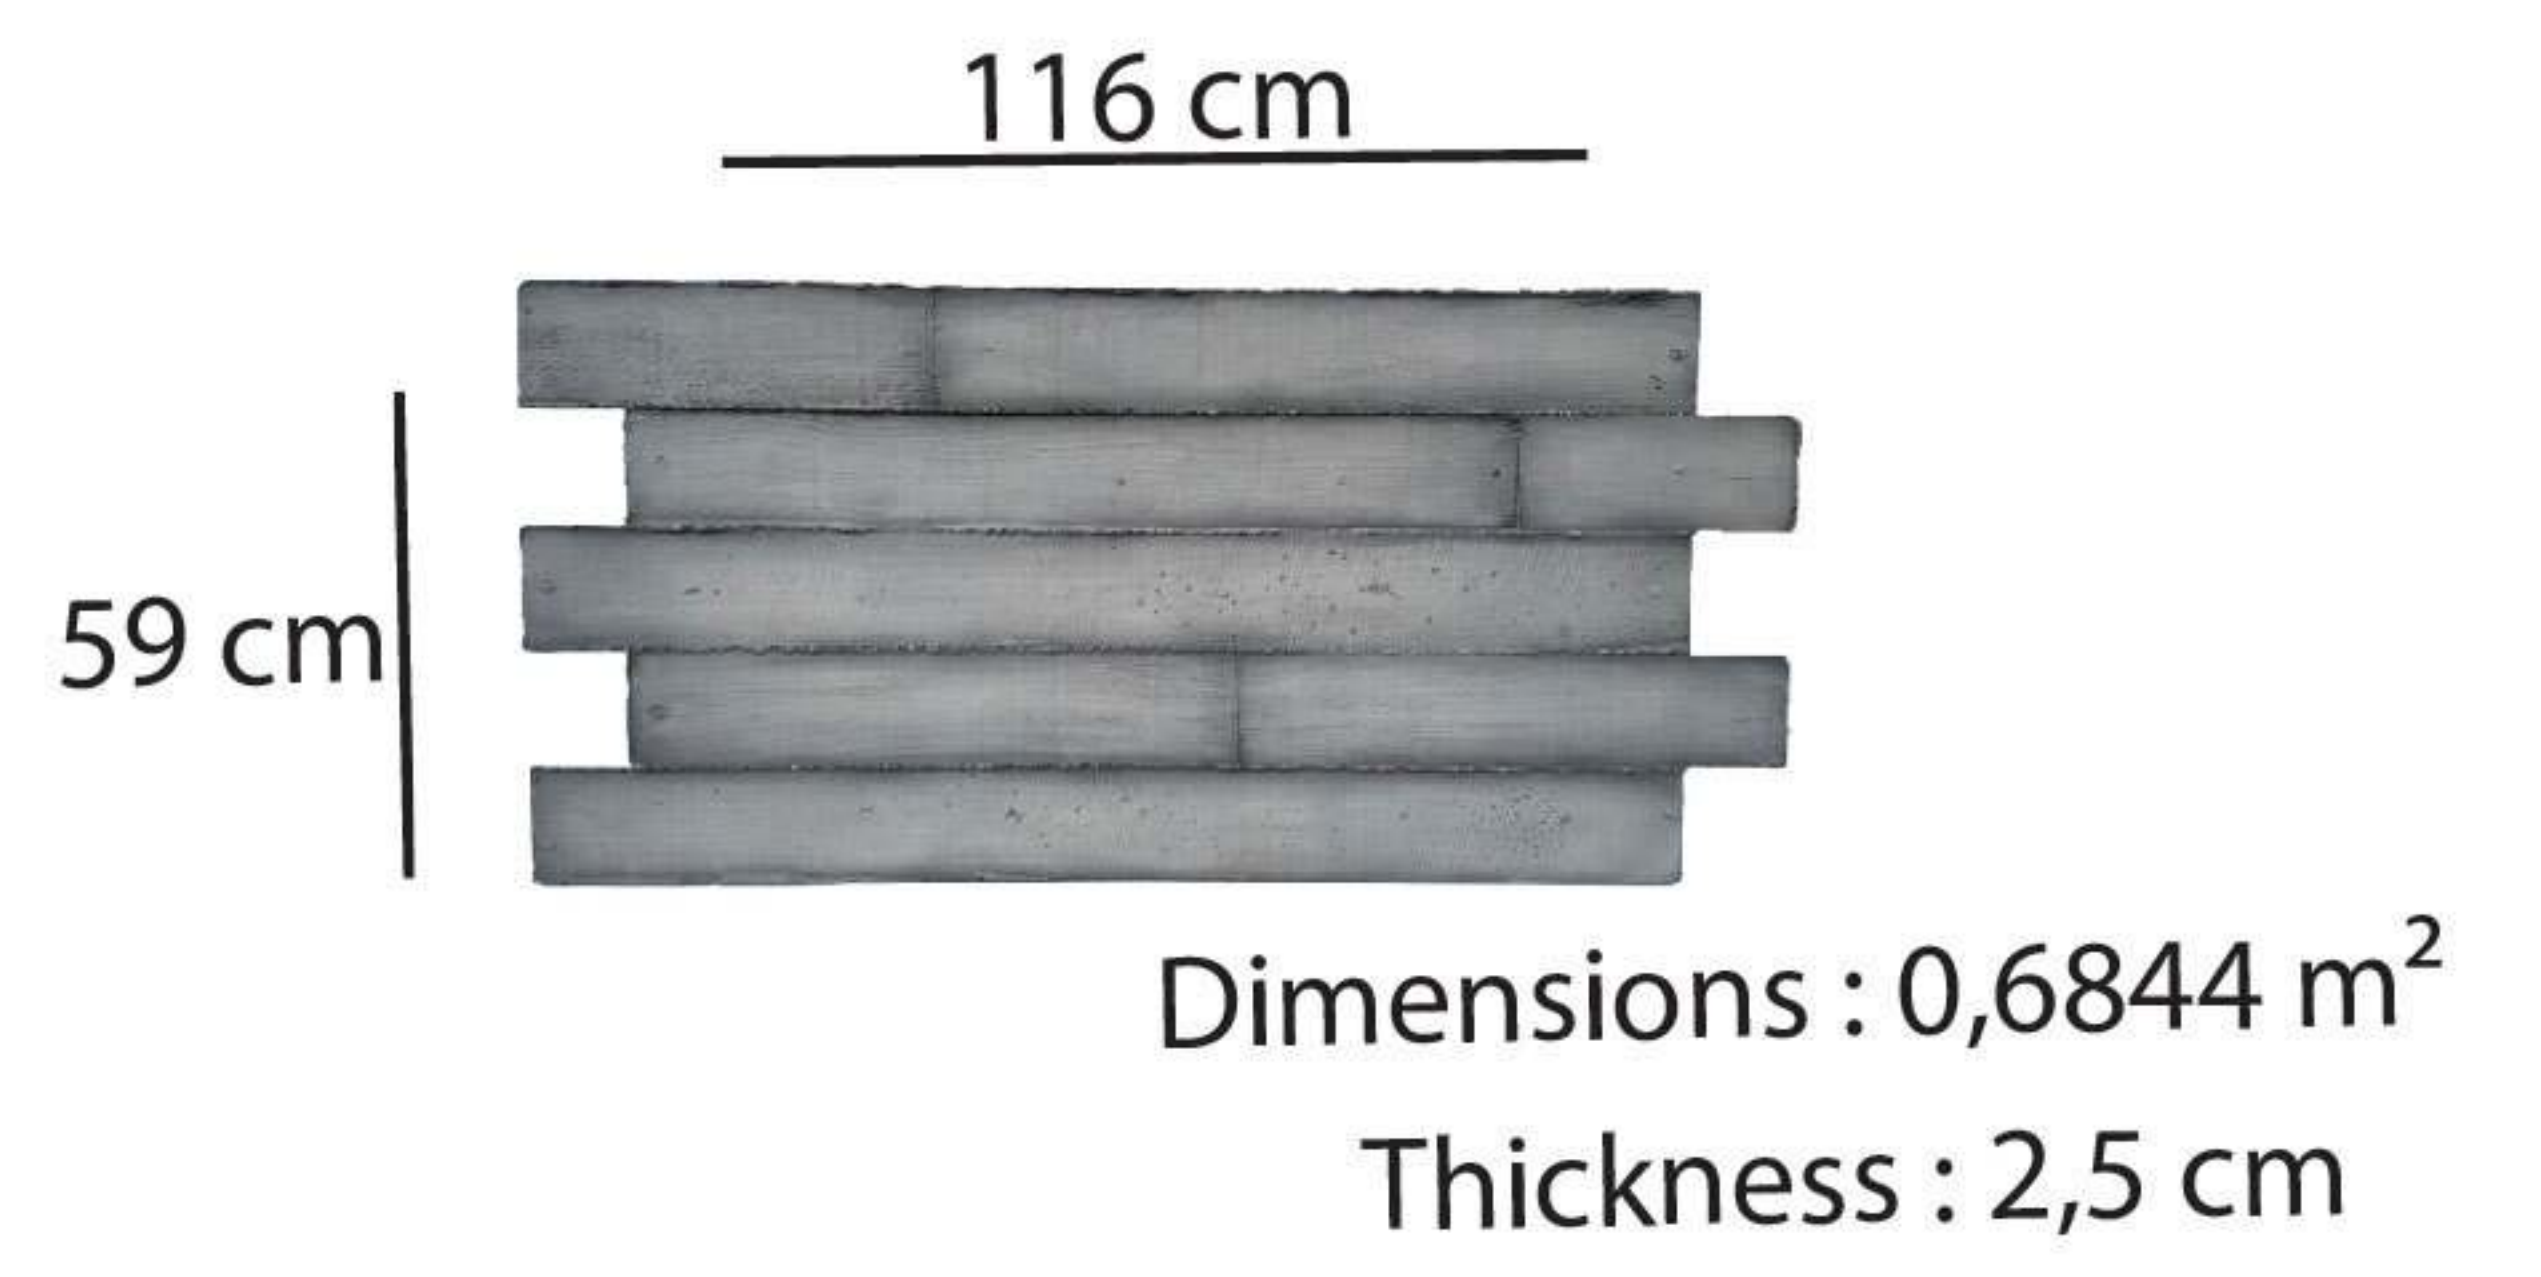


Grey

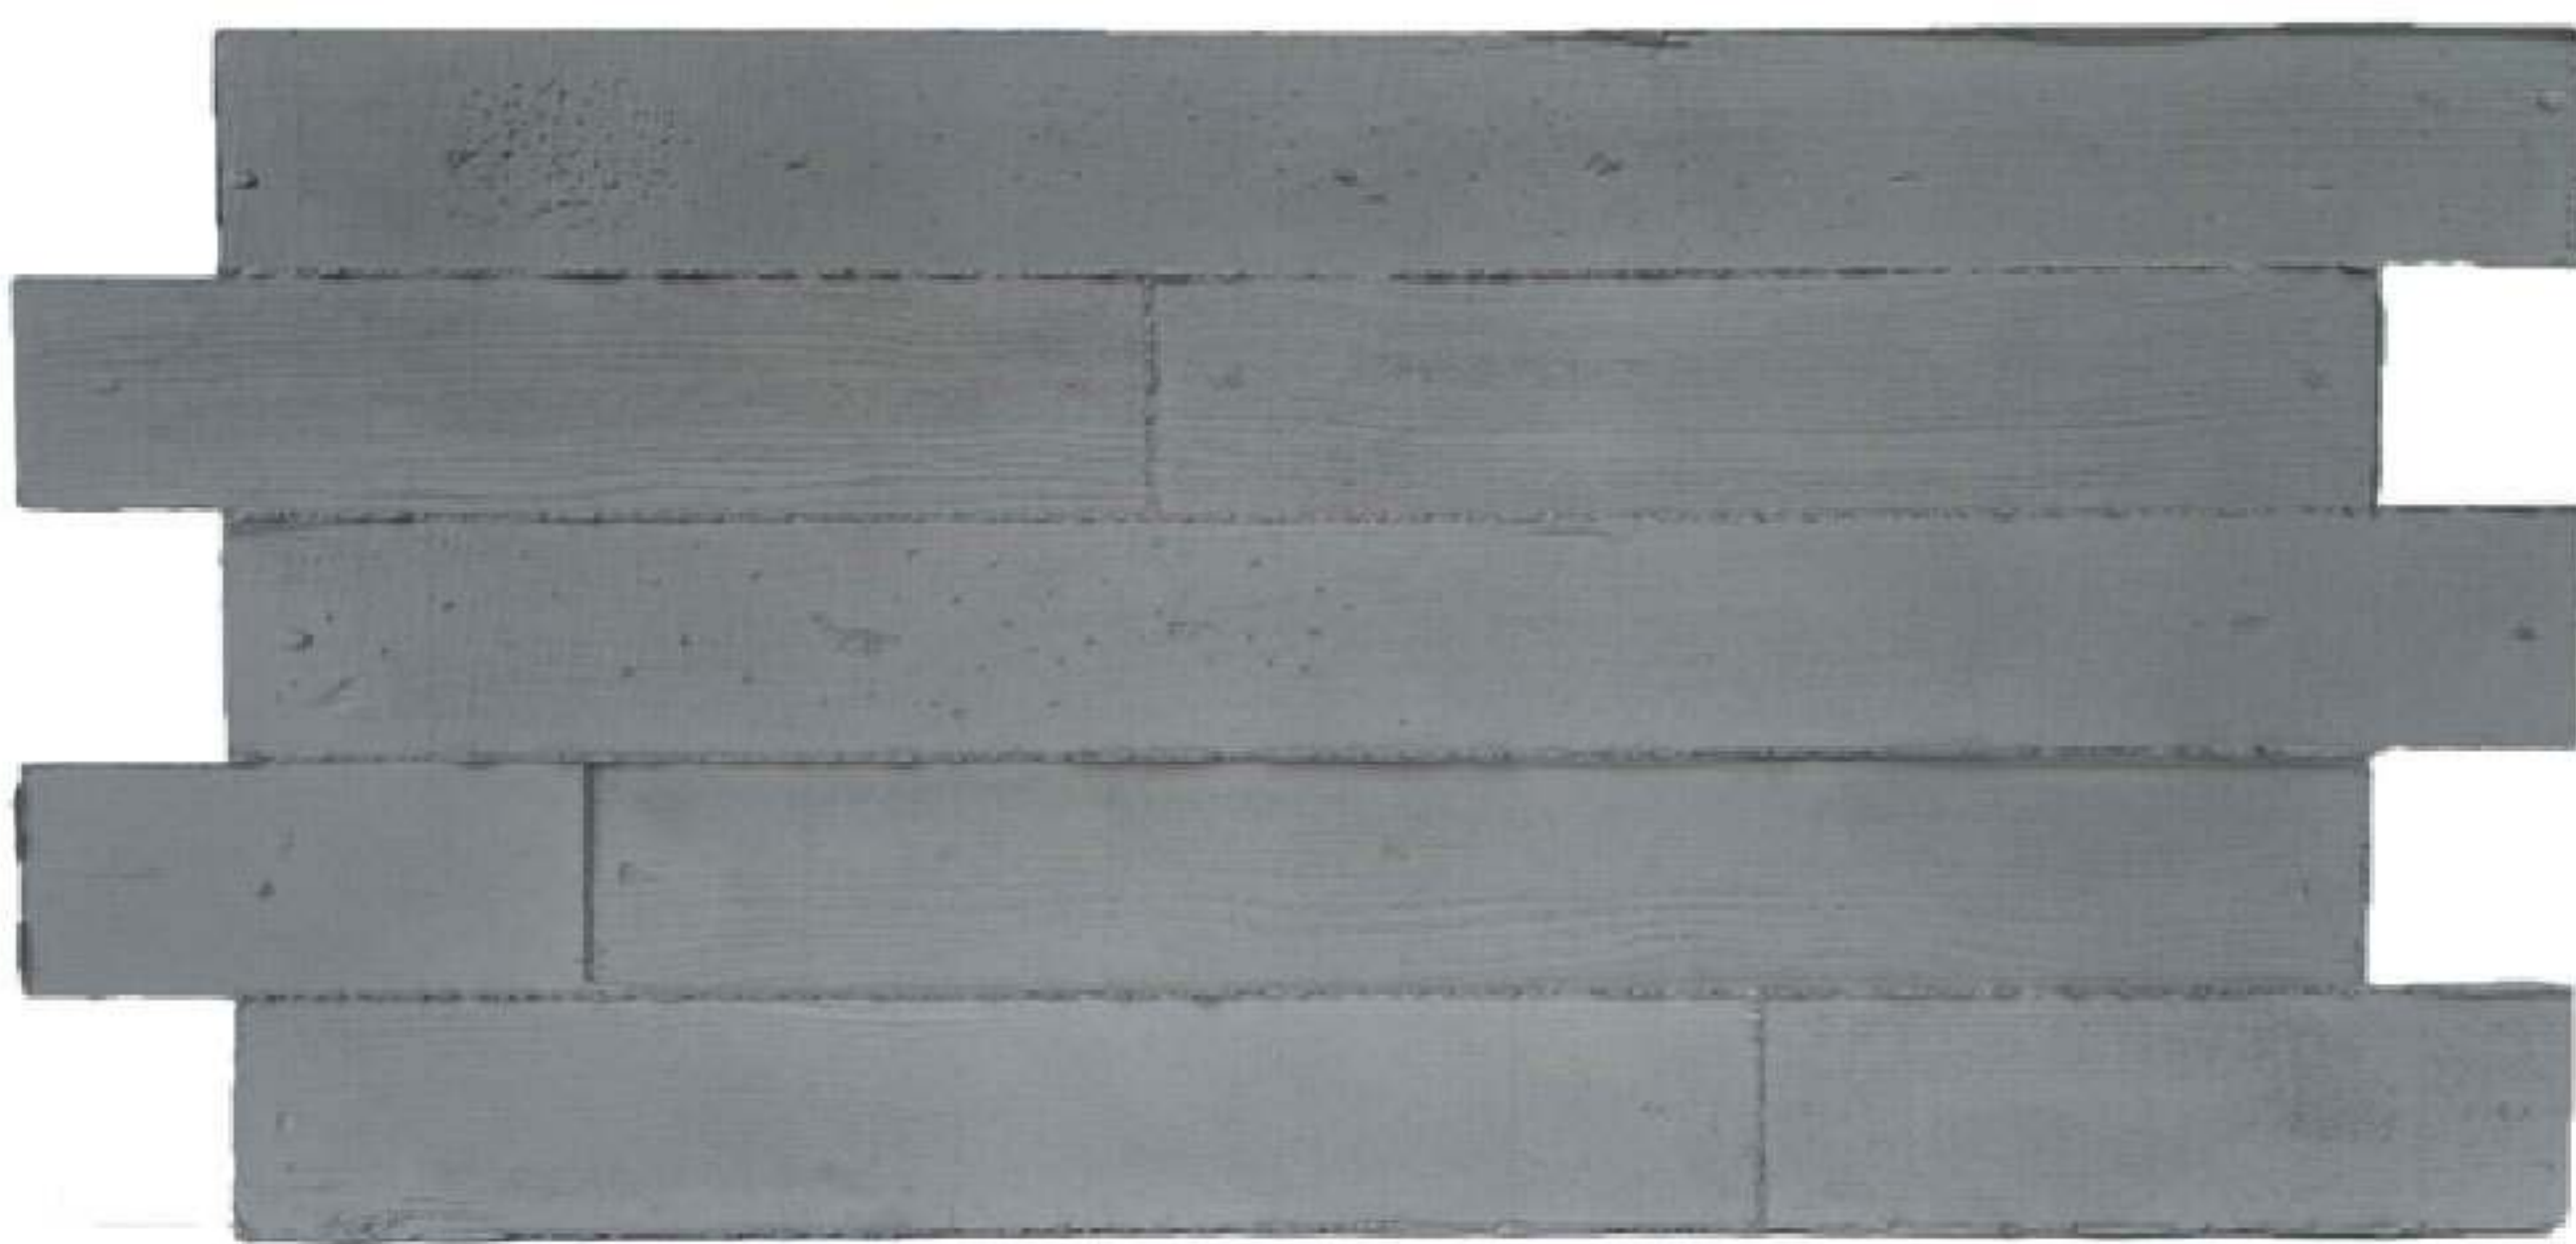

Grey Nero



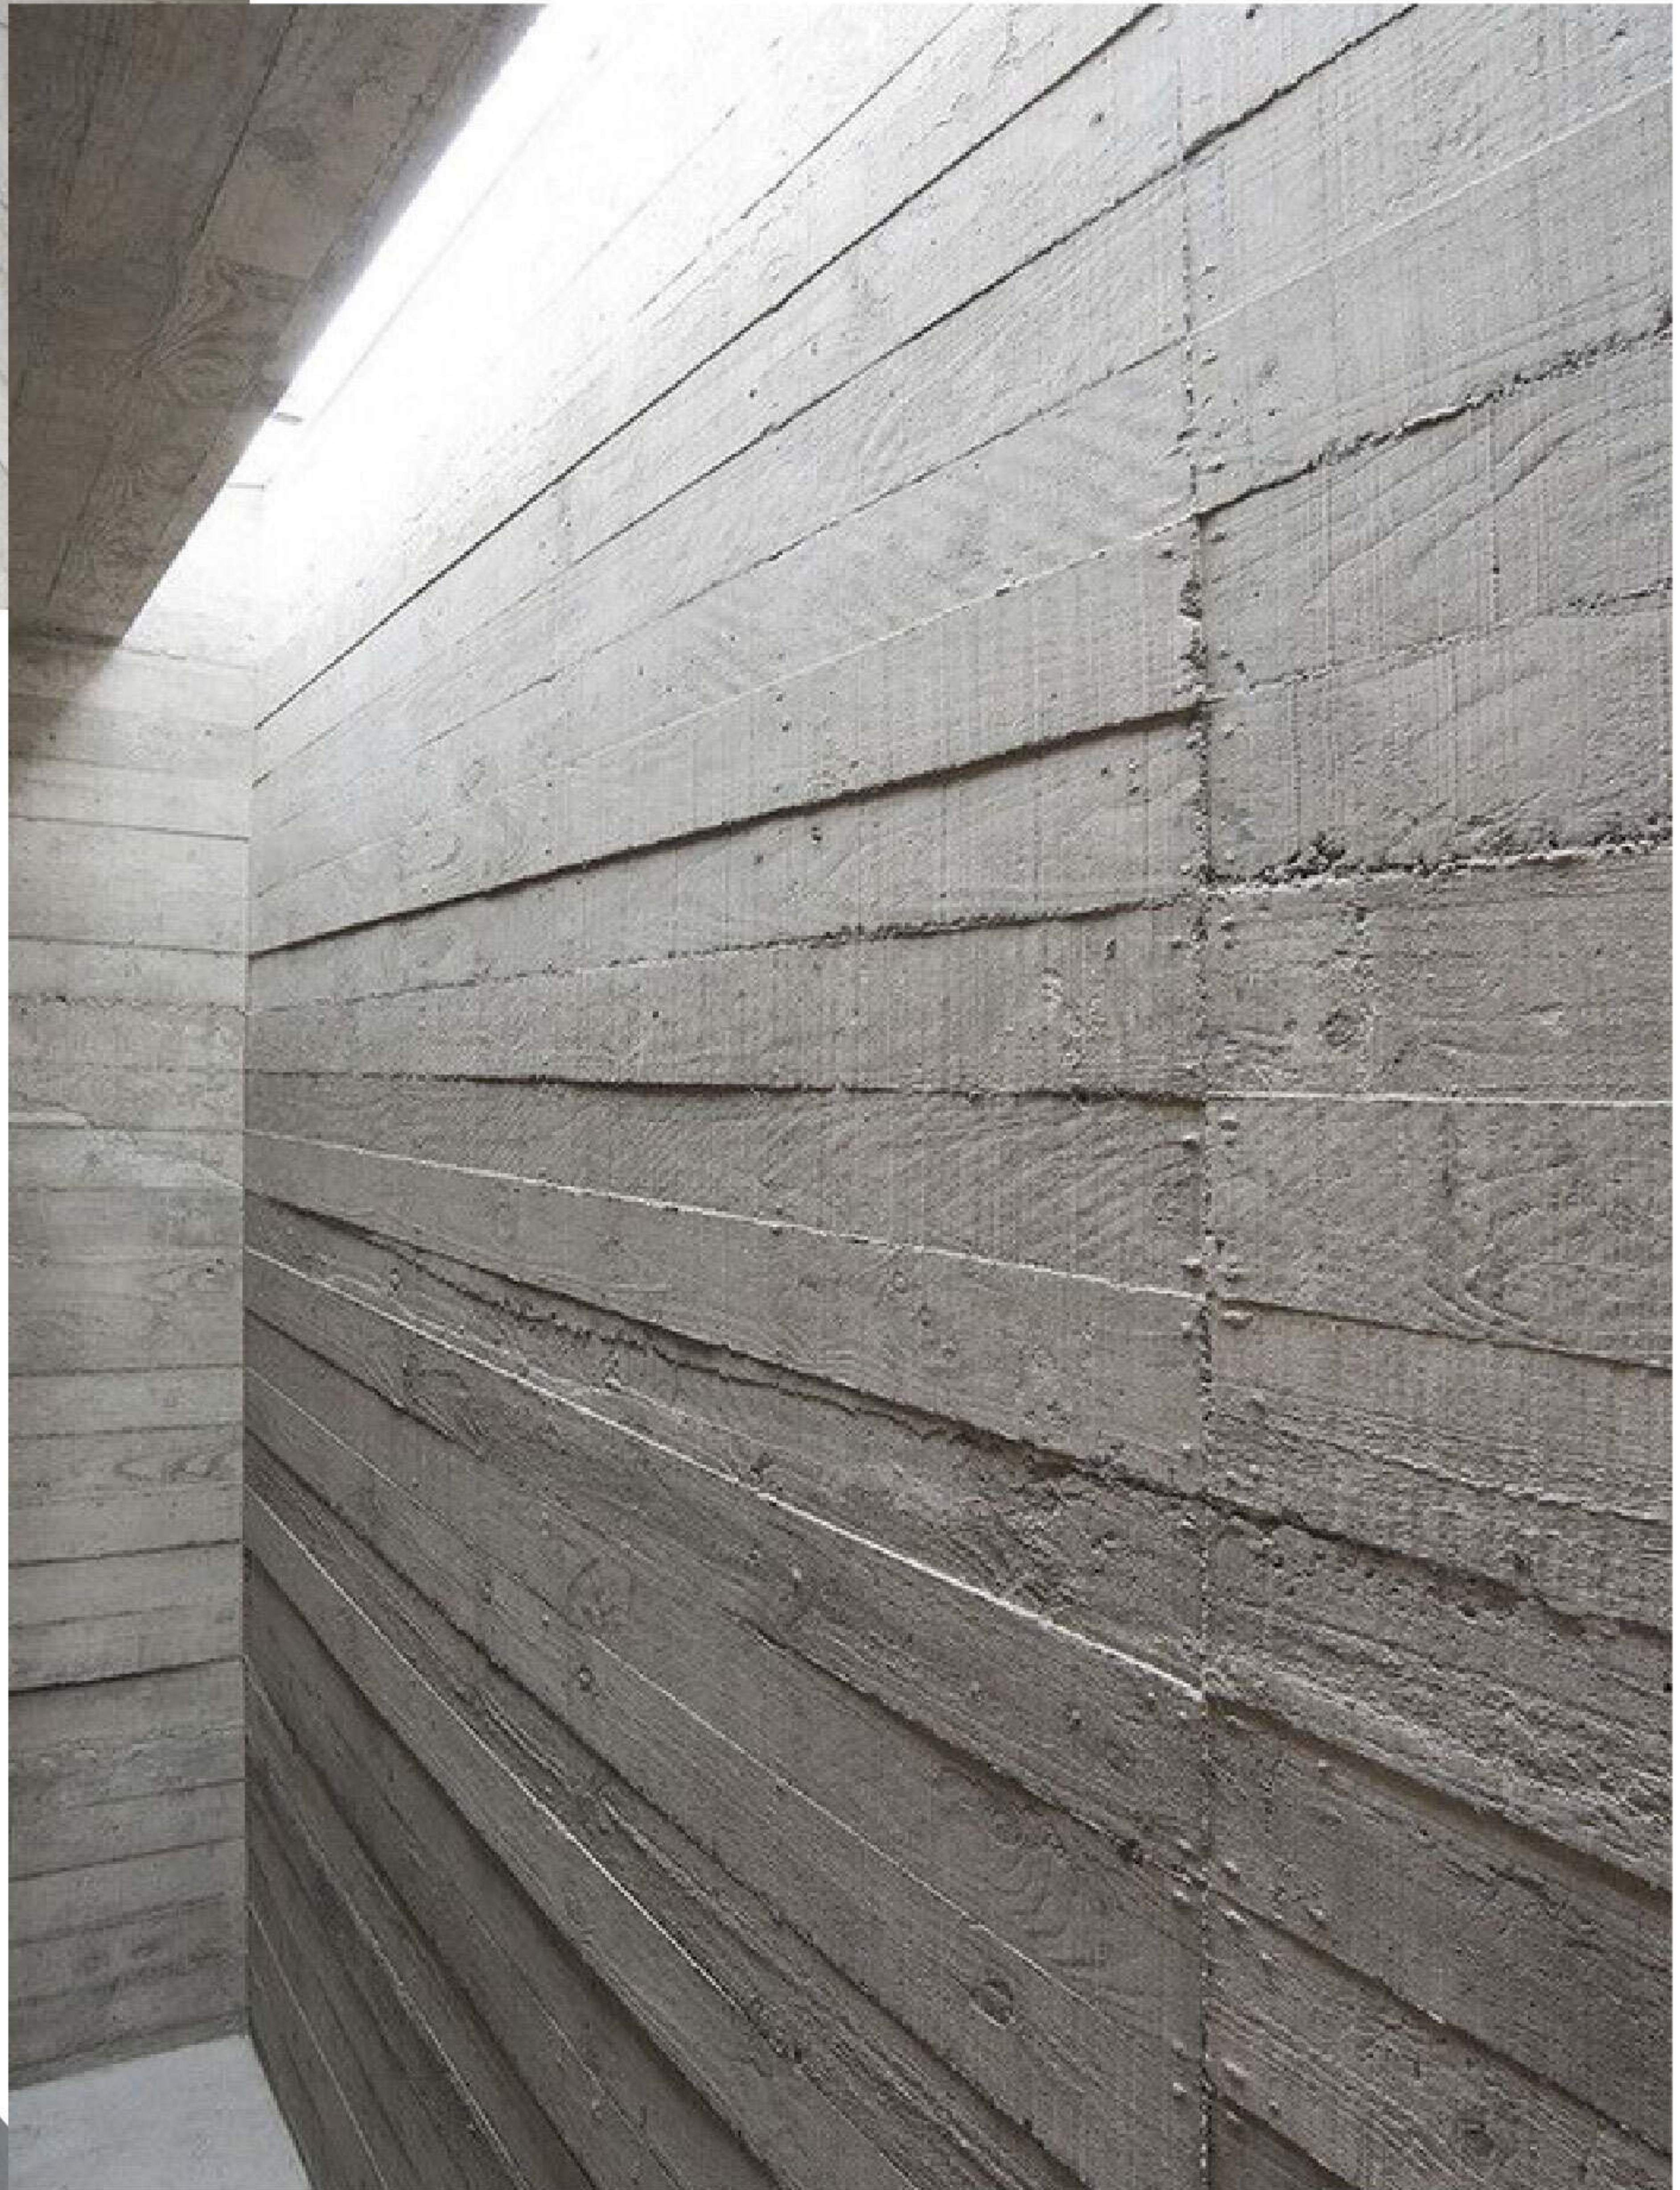

Assembly and application



Use a utility knife to cut the panel to fit the wall.



Apply the glue to the back of the panel



Stick the panel to the wall and press it for 2-3 seconds.



Apply sealant to the joints of the panels.



Using a brush, shape the paste according to the pattern.




Apply touch-up paint to the dried paste.










Easy Montage

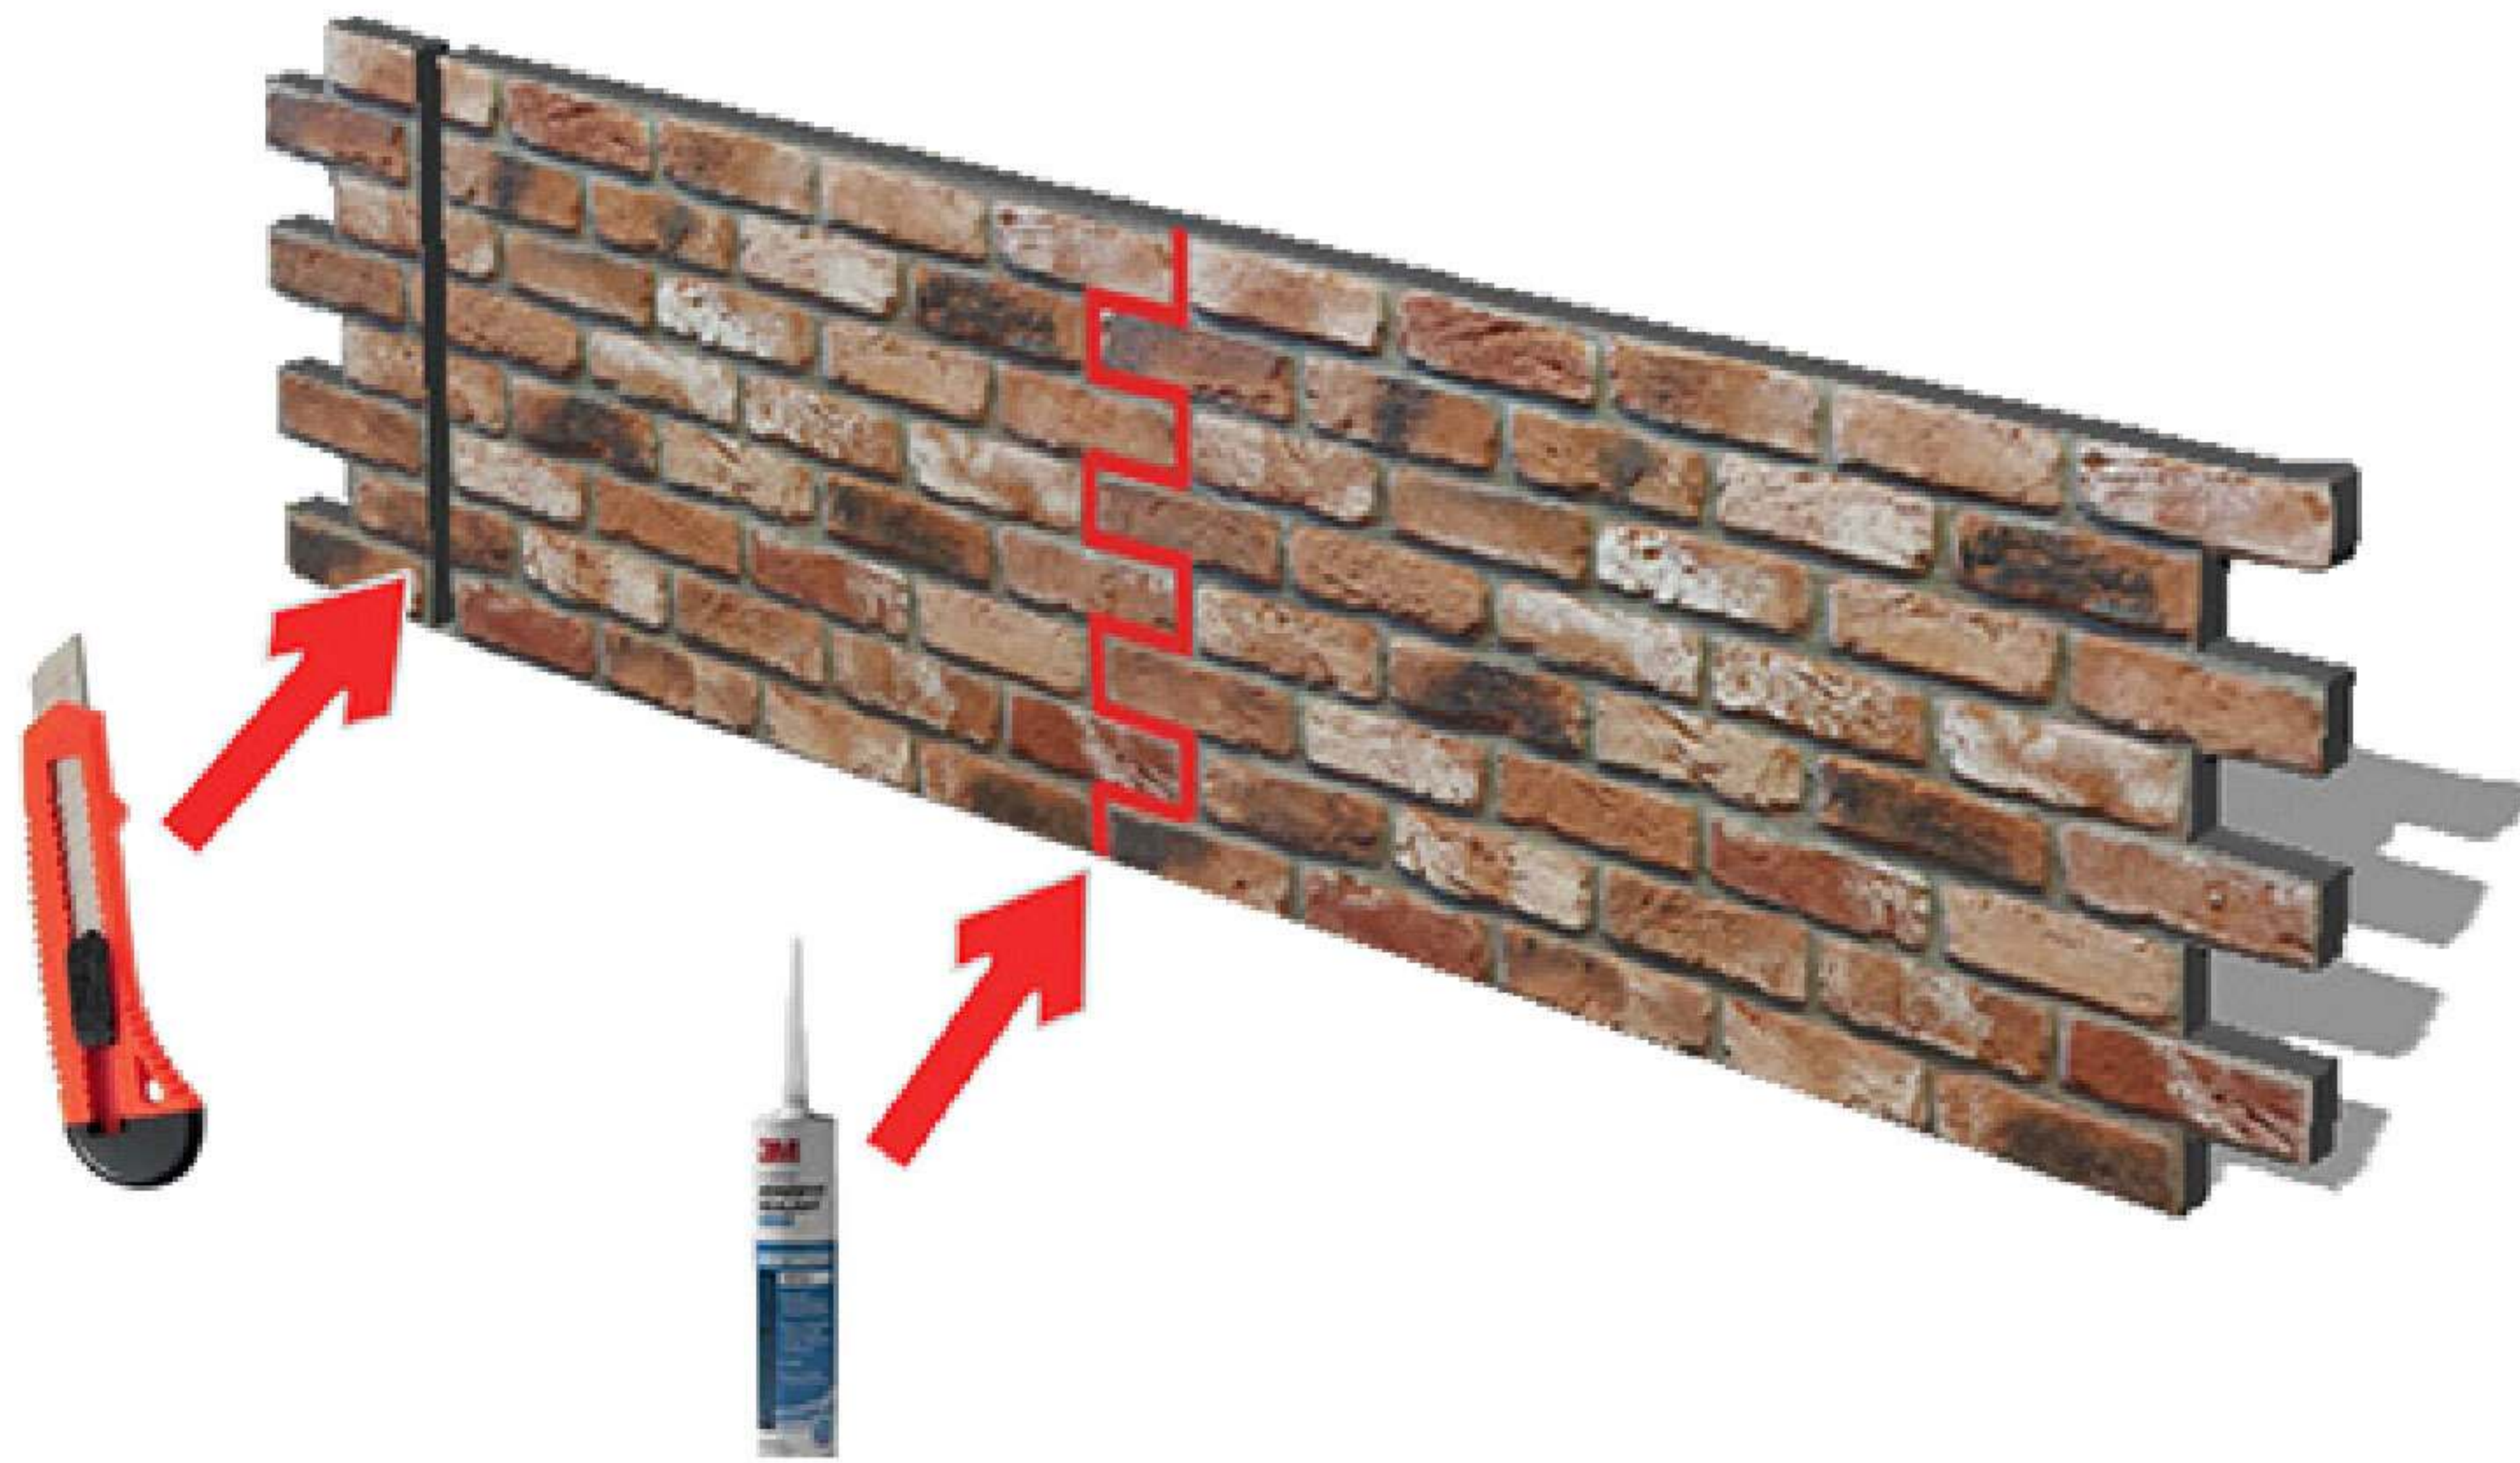

Heat Isolation

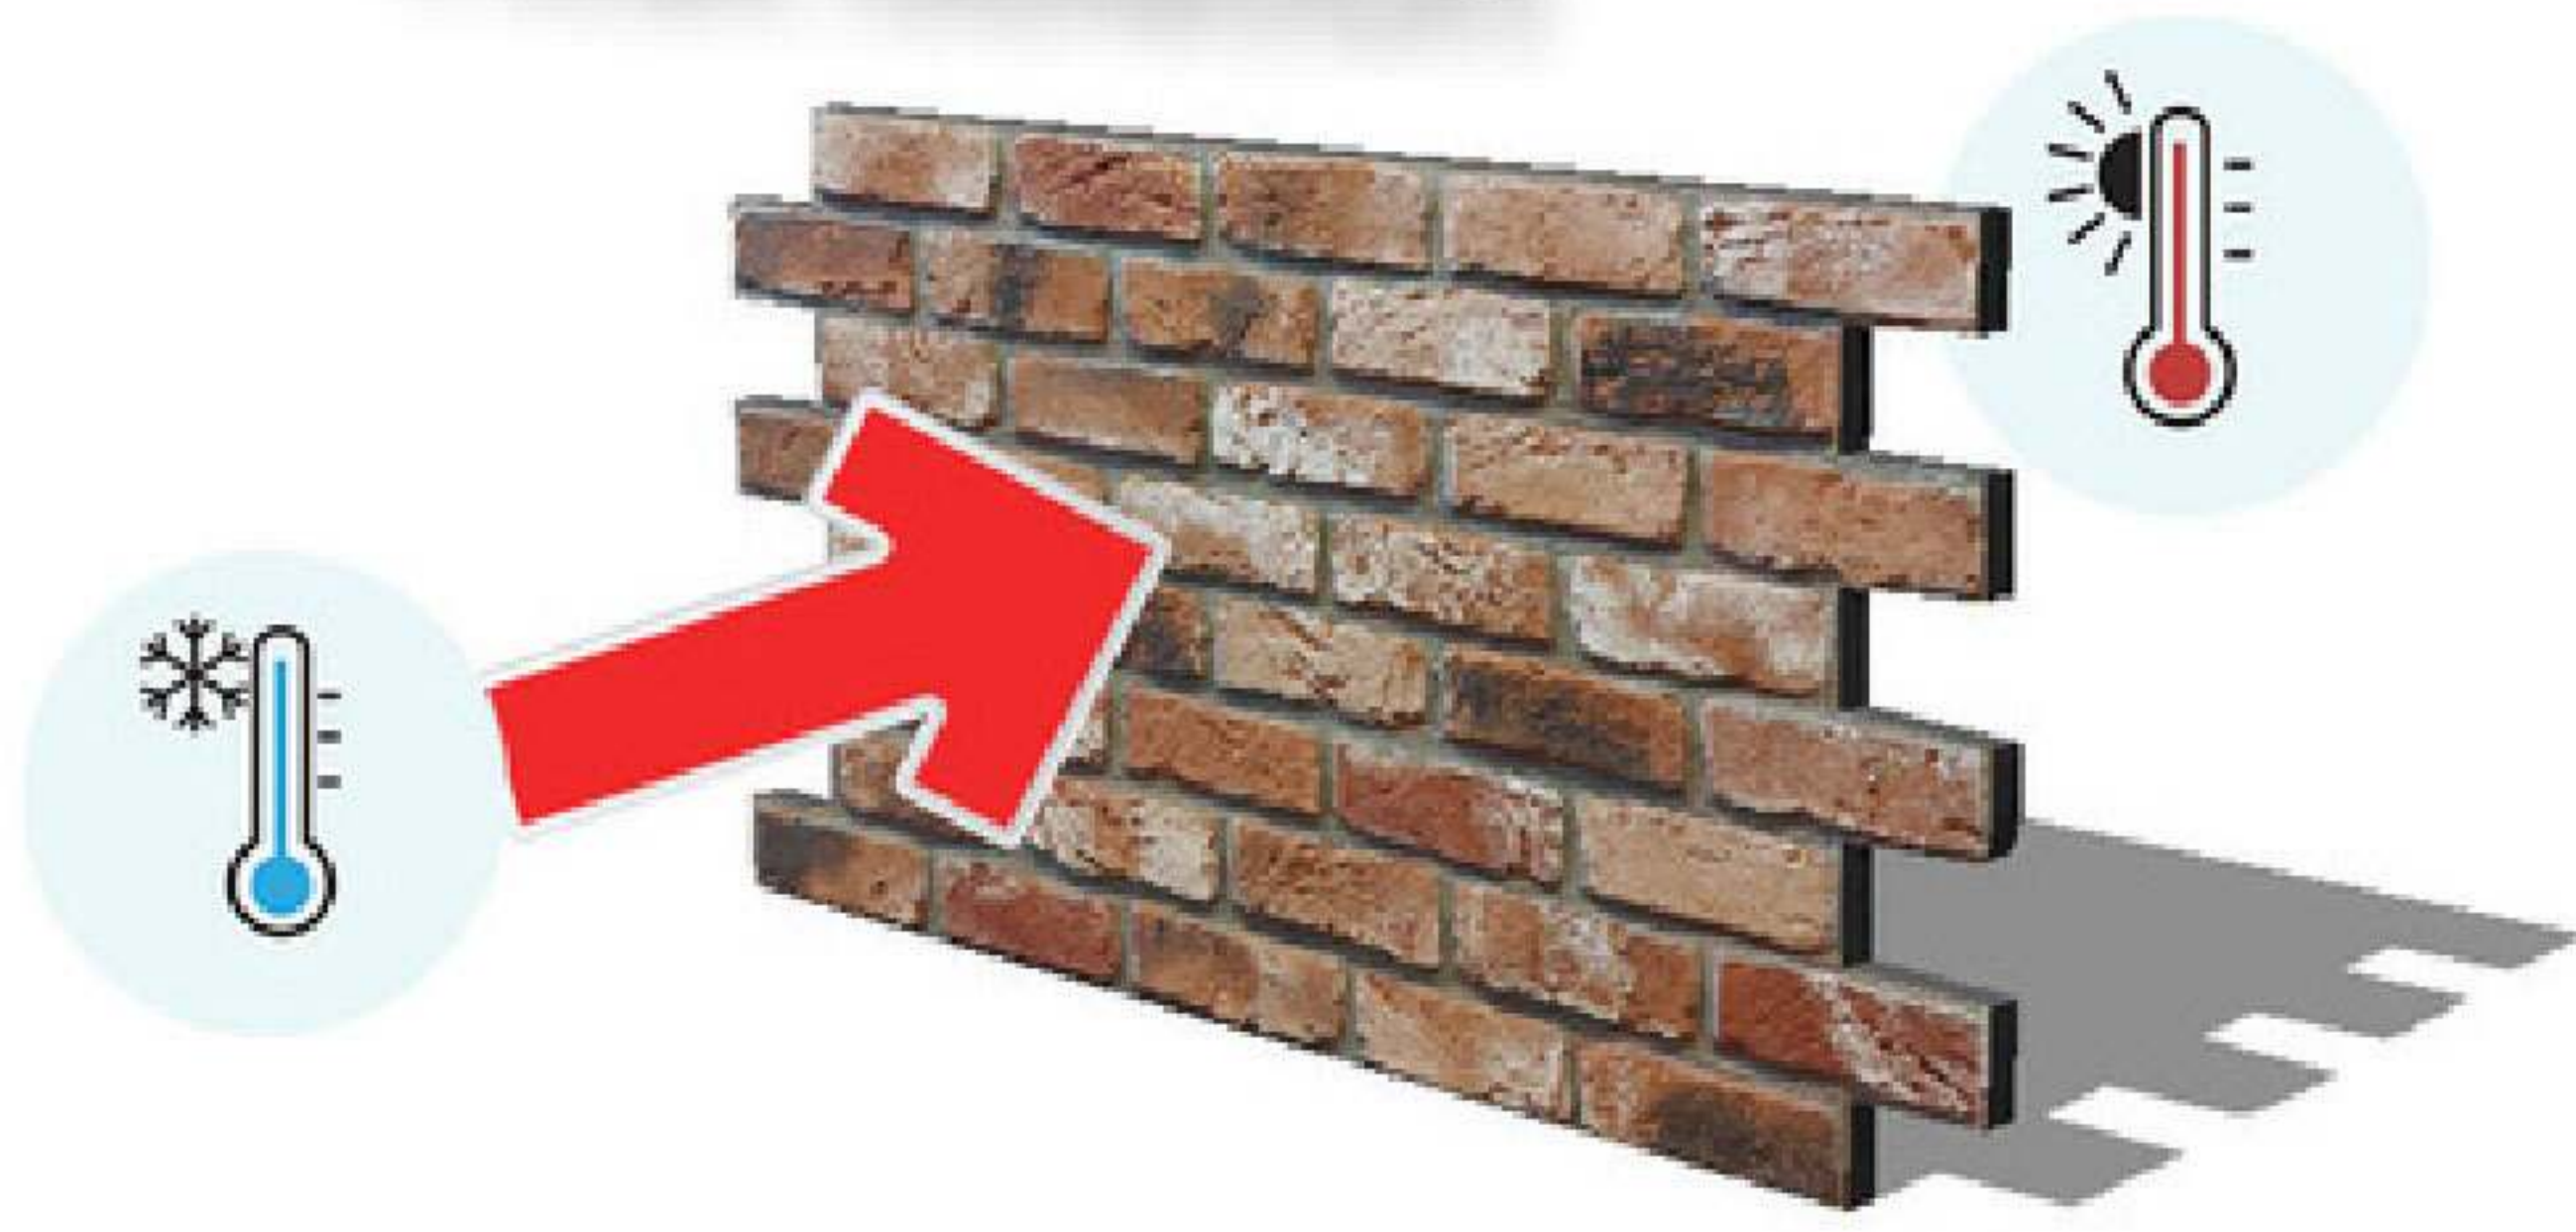


Sound Isolation

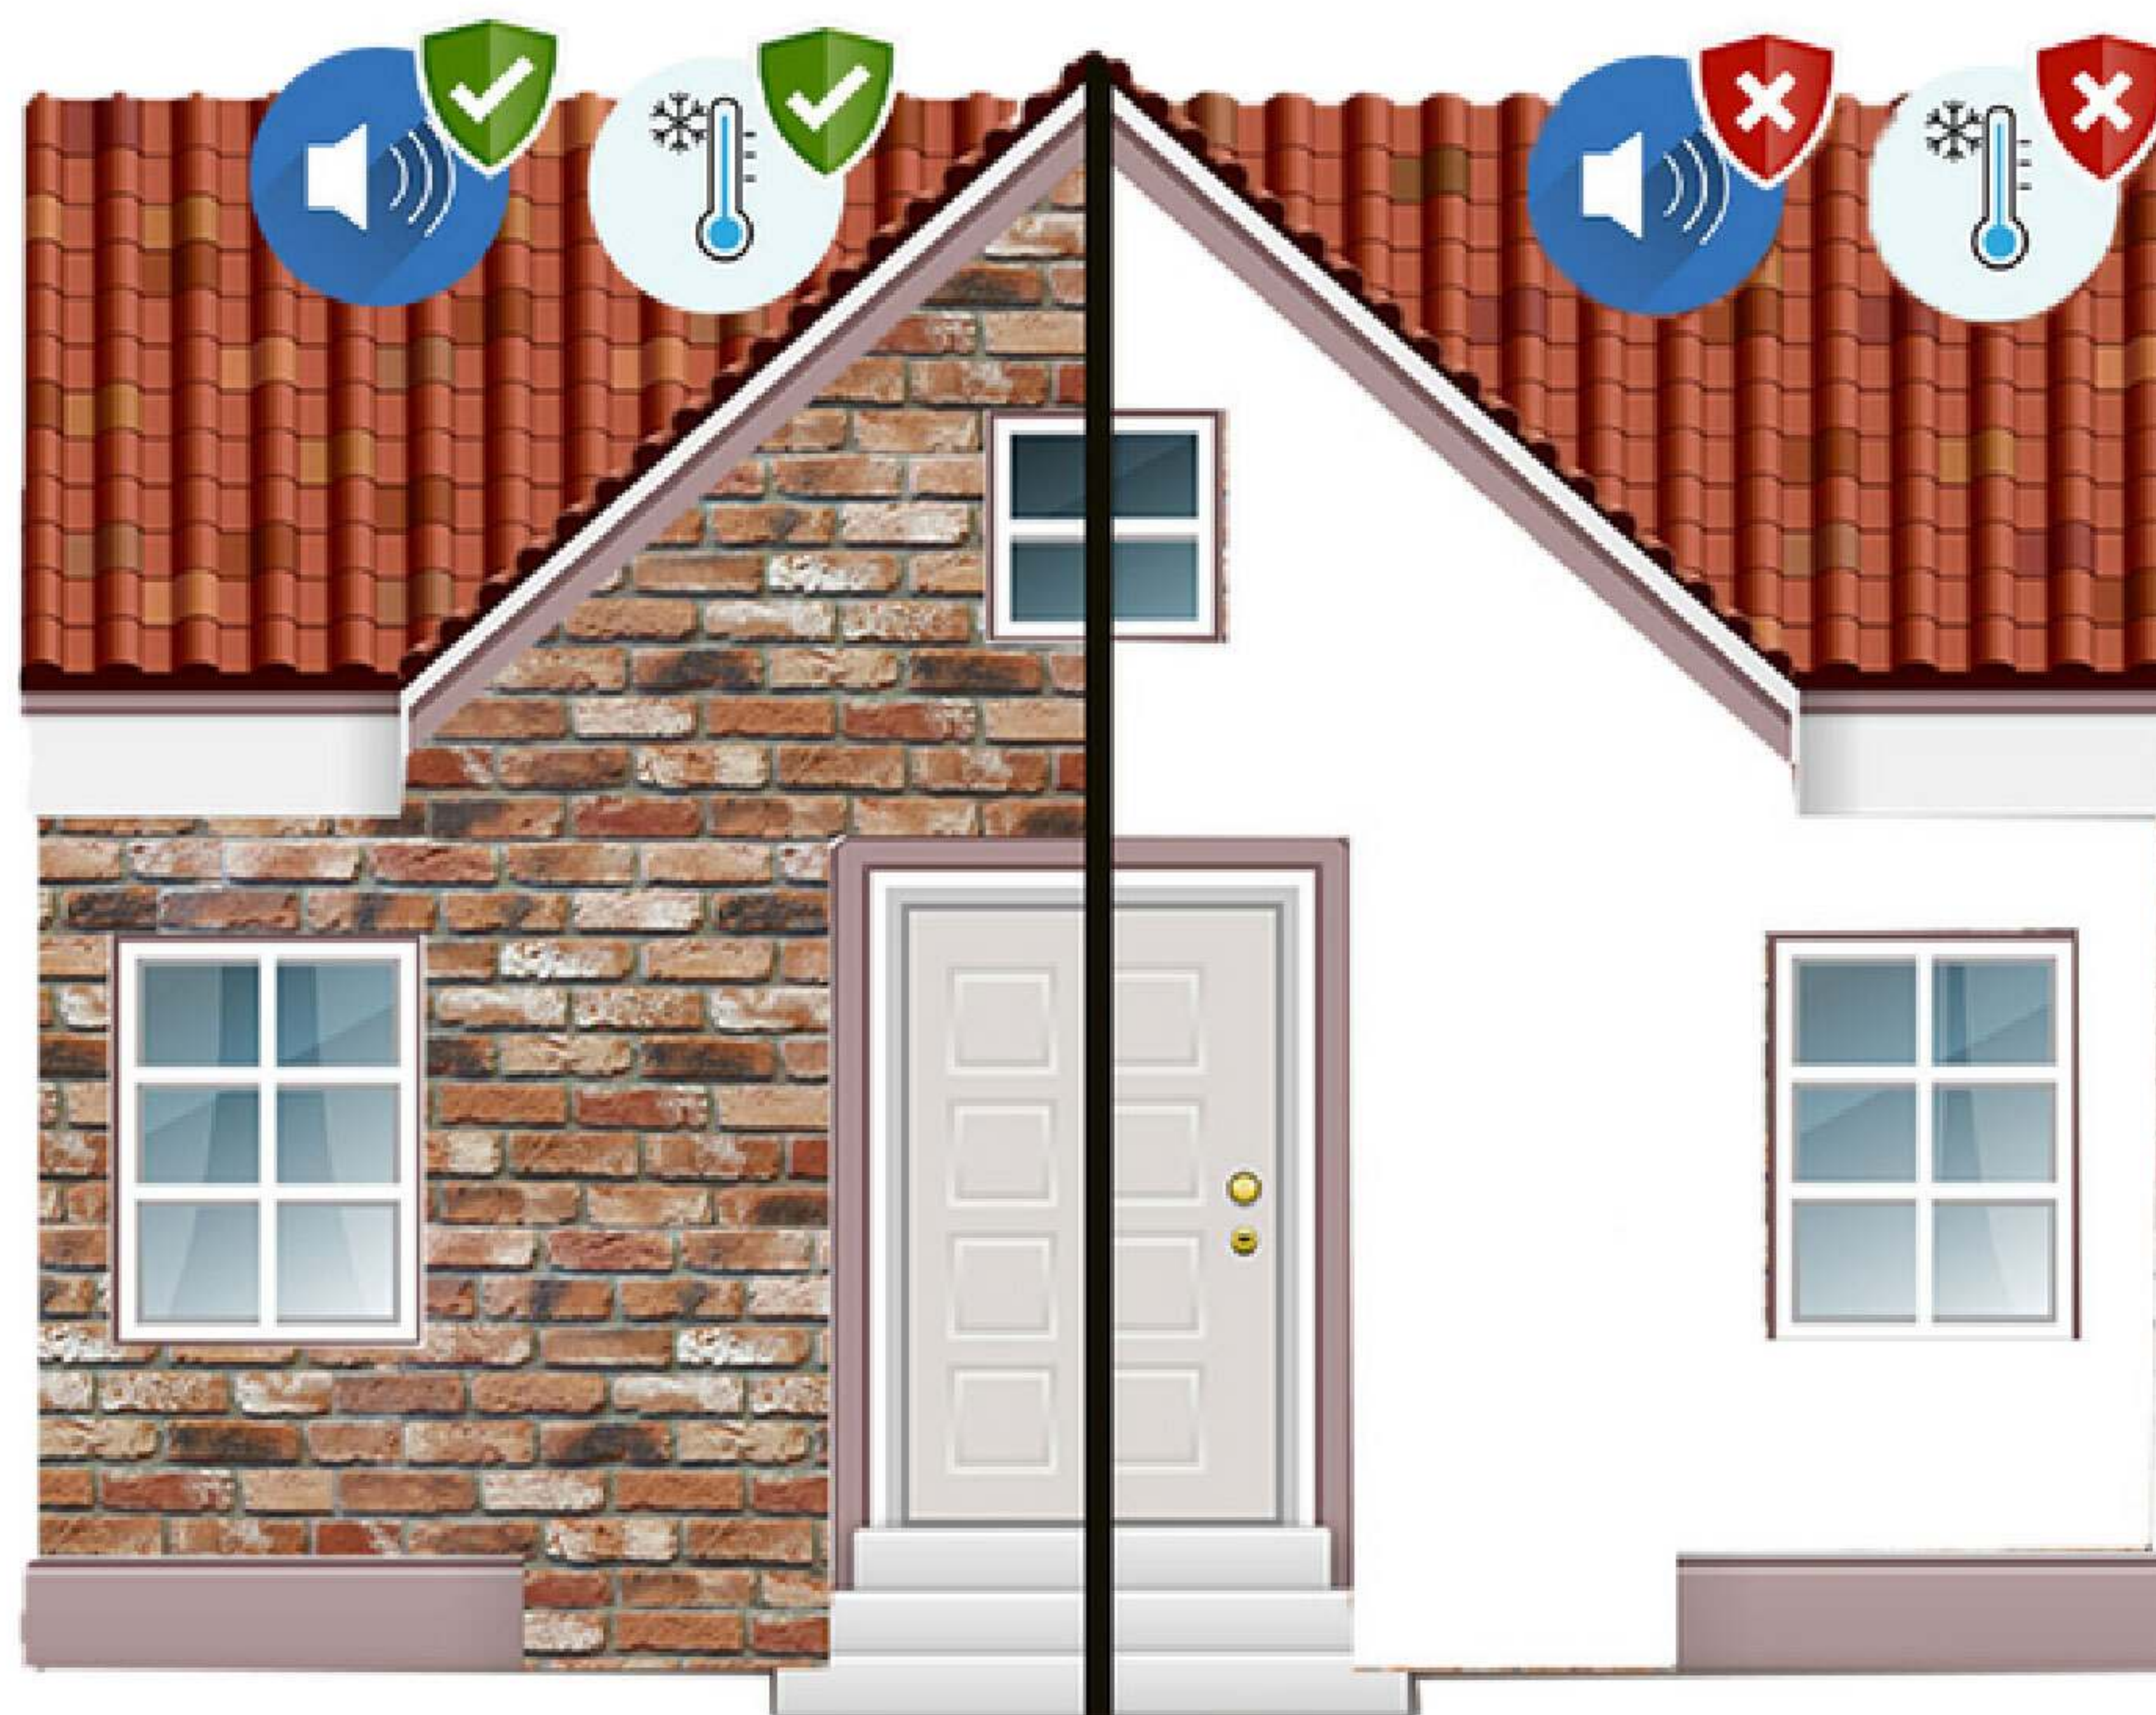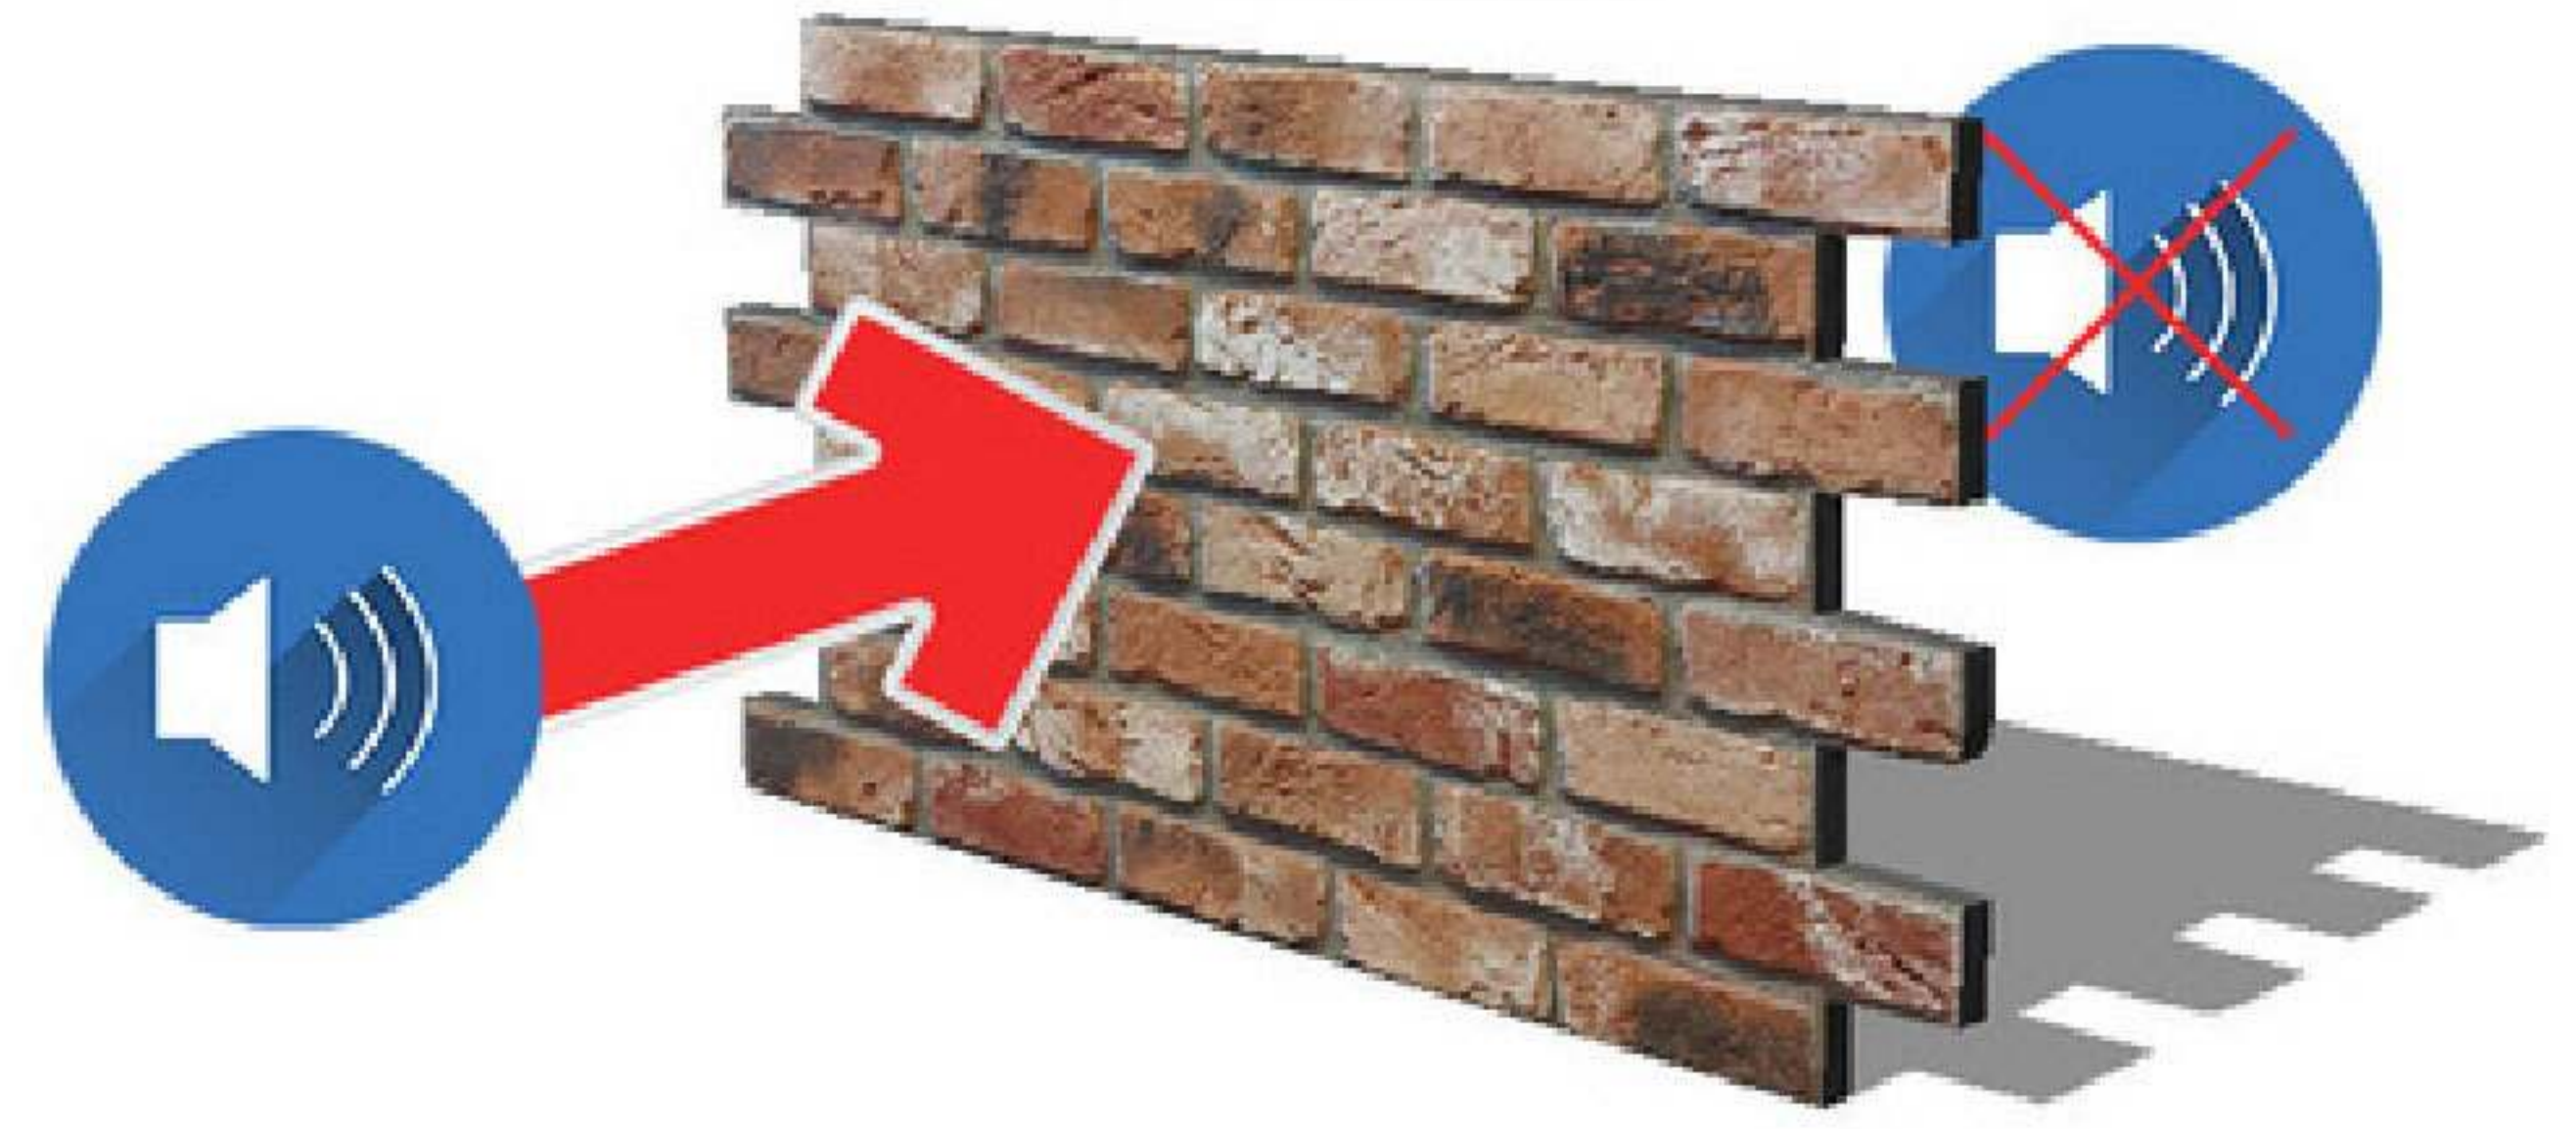

Technical characteristics

- Rigid is made from 100% pure dense polyurethane.
- Kanater polyurethane wall panel is the lightest yet strongest panel in the decoration sector.
- It has no dangerous ingredients. Fully cured product.
- Extremely hard and durable surfaces such as natural wood, concrete, brick and stone.
- High impact resistance.
- 100% odorless and not harmful to health.
- It has thermal insulation feature
- It has sound insulation feature
- The fire protection class is non-flammable class B2.
- The installation method is to layer foam onto any sustainable surface.
- Screw support can be provided in addition to adhesive if preferred.
- Easy to process and cut with normal carpentry tools.
- Products can be cleaned with water. It does not require additional cleaning, it can be easily wiped clean.

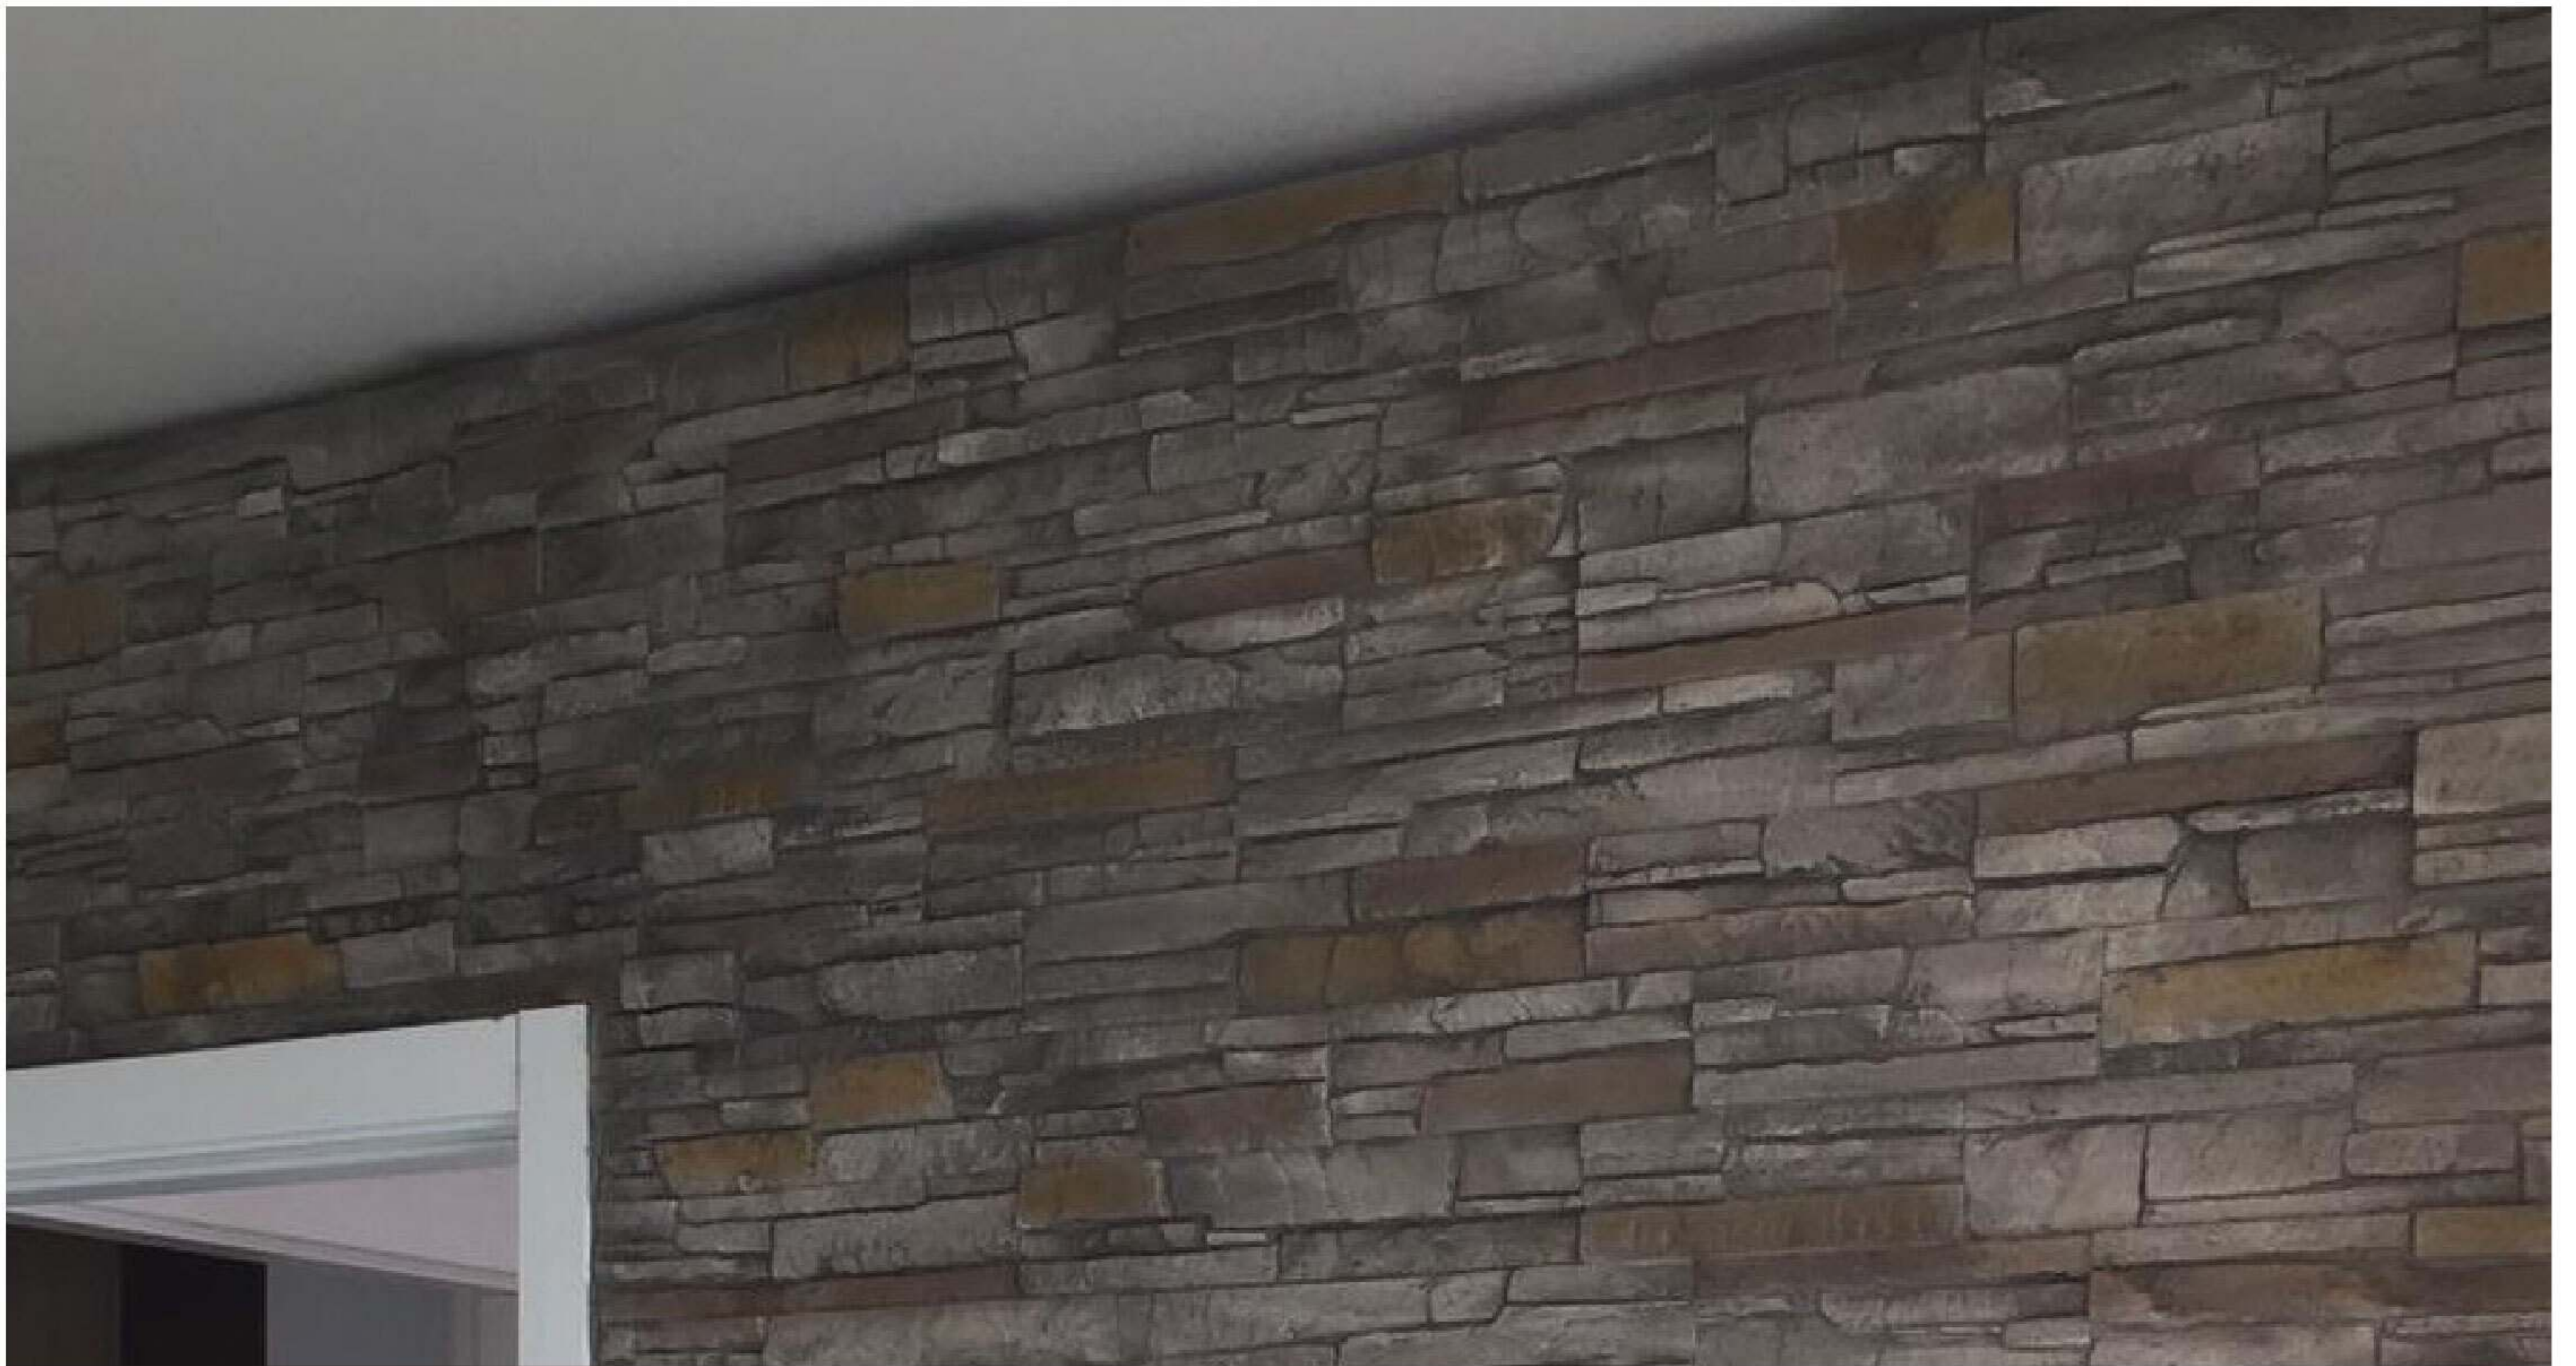

realistic
textures





 **KANATER**[®]
Decor & Construction

www.kanatergroup.com
Phone: +90 552 555 75 52
Export@kanatergroup.com

